


UL CSA

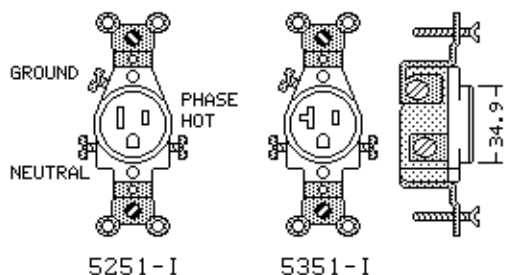

INDUSTRIAL SPECIFICATION GRADE

125V 60 Hz AC, 2-Pole 3-Wire Ground

Steckdosen

Receptacles

| Catalog Number* | Amp. | NEMA | Color | UPE/Pack | Description | SIDE WIRED |
|-----------------|------|-------|-------|----------|-------------|---|
| 5251■ | 15 | 5-15R | Brown | 50 | Single | Terminals accept up to AWG 12 copper or copper clad wire. |
| 5251-I■ | 15 | 5-15R | Ivory | 50 | Single | |
| 5015■ | 15 | 5-15R | Brown | 100 | Single | All receptacles have a green colored grounding screw. |
| 5015-I■ | 15 | 5-15R | Ivory | 100 | Single | |
| 5351 | 20 | 5-20R | Brown | 50 | Single | *Catalog #5015 and #5801 are Commercial Specification Grade only. |
| 5351-I | 20 | 5-20R | Ivory | 50 | Single | |
| 5801 | 20 | 5-20R | Brown | 100 | Single | |
| 5801-I | 20 | 5-20R | Ivory | 100 | Single | |