


Cat. No's indicates products of different manufacturers available.

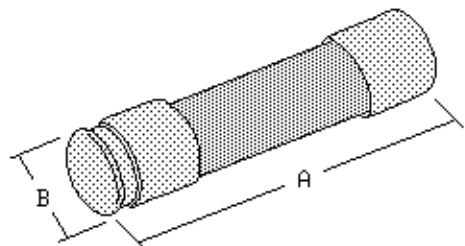

Indicated dimensions only refer to first catalog number listed.

UL 198E/L CSA ■ HRCI-R

250 V AC

125 V DC

UL Class RK5 Time Delay
 träge

Interrupting rating AC
200,000 Amps. RMS Sym.

| Cat. No's | Nennstrom / Rated Current 0.1 - 60 Amp. | | | | | | UPE Packed | Dimensions = mm | | |
|--|--|----|----|----|----|----|---------------|-----------------|------|-----|
| | A | B | C | | | | | | | |
| FLNR ■ FRNR ■ TR-R ■ CRNR ■ ECNR ■ | 1 | 2 | 3 | 4 | 5 | 6 | 10 | 50.8 | 14.3 | --- |
| | 7 | 8 | 9 | 10 | 12 | 15 | | | | |
| | 20 | 25 | 30 | | | | | | | |
| | 35 | 40 | 45 | 50 | 60 | | 10 | 76.2 | 20.6 | --- |

NOTE: Intermediate Amp. Sizes upon Request