


Cat. No's indicates products of different manufacturers available.

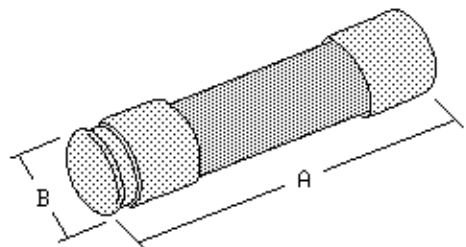

Indicated dimensions only refer to first catalog number listed.

UL 198E/L CSA ■ HRCI-R

600 V AC

300 V DC

UL Class RK5 Time Delay  
träge

Interrupting rating AC  
200,000 Amps. RMS Sym.

Cat. No's	Nennstrom / Rated Current 0.1 - 60 Amp.						UPE Packed	Dimensions = mm		
	A	B	C							
FLSR ■ FRSR ■ TRS-R ■	1	2	3	4	5	6	10	127.0	20.6	---
	7	8	9	10	12	15				
CRSR ■ ECSR ■	20	25	30				10	139.7	27.0	---
	35	40	45	50	60					

NOTE: Intermediate Amp. Sizes upon Request