


**FUSE HOLDERS**

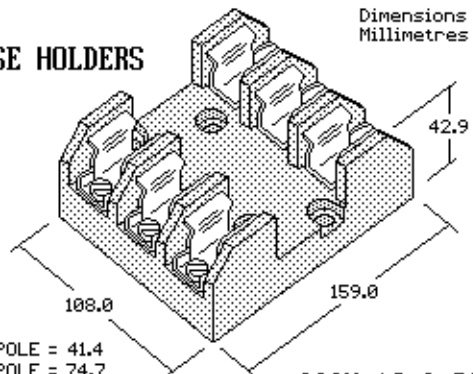

1 POLE = 41.4  
2 POLE = 74.7

600V AC 0-30A

Base, General

Purpose Phenolic, 150°C, Class R


Holders Have Been Tested and Approved

for 200,000 Amp Interrupting Capacity,  
Holders Used with Fuses (Ø 20.6 x 127.0)mm

UL CSA

600V  
30A

UL Class  
H, K, R

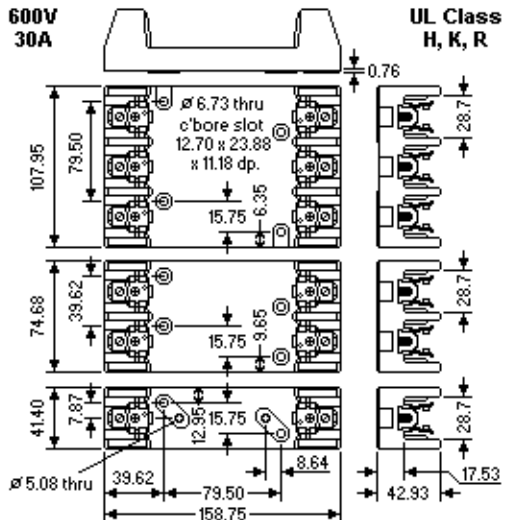

Wire Connectors: S SP B

No. of Poles	Cat.No. Standard	Class H + K Reinforced	Cat.No. Class R	Wire Connector	Copper Wire Range (AWG)	UPE Packed
1	6F30A1S	R6F30A1S	6R30A1S	Screw	10 - 22	50
2	6F30A2S	R6F30A2S	6R30A2S	Screw	10 - 22	25
3	6F30A3S	R6F30A3S	6R30A3S	Screw	10 - 22	20
1	6F30A1SP	R6F30A1SP	6R30A1SP	Sems Press.	10 - 14	50
2	6F30A2SP	R6F30A2SP	6R30A2SP	Sems Press.	10 - 14	25
3	6F30A3SP	R6F30A3SP	6R30A3SP	Sems Press.	10 - 14	20
1	6F30A1B	R6F30A1B	6R30A1B	Box	6 - 14	50
2	6F30A2B	R6F30A2B	6R30A2B	Box	6 - 14	25
3	6F30A3B	R6F30A3B	6R30A3B	Box	6 - 14	20