


Cat. No's indicates products of different manufacturers available.

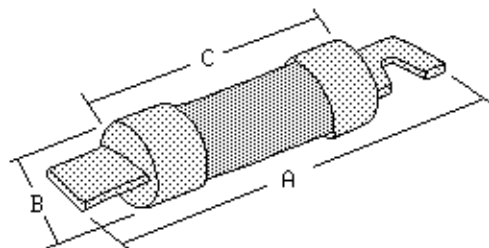

Indicated dimensions only refer to first catalog number listed.

UL 198E/L CSA ■ HRCI-R

600 V AC

300 V DC

Time Delay

UL Class RK5 träge

Interrupting rating AC  
200,000 Amps. RMS Sym.

Cat. No's	Nennstrom / Rated Current 70 - 600 Amp.					UPE Packed	Dimensions = mm		
	A	B	C						
FLSR ■	70	75	80	90	100	5	200.0	33.3	146.0
FRSR ■	110	125	150	175	200	1	244.5	46.8	169.9
TRS-R ■									
CRSR ■	225	250	300	350	400	1	295.3	65.9	193.7
ECSR ■									
	450	500	600			1	339.7	78.6	217.5