**1330** 01

## Decora Plus® Duplex GFCI Receptacle, 20A/125V

## Decora Plus Duplex GFCI Receptacle, Black and Red Buttons

## **Features**

Grounding:	GFCI Ground Fault
Ratings:	20 Amp, 125 Volt, 60 Hz, at Receptacle
• NEMA:	5-20R, Straight Blade
Poles/Wires:	2 Pole, 3 Wire
Termination:	Back & Side, 20A 125V Feed-Thru, Terminals accepts 14-12 AWG
Material:	Thermoplastic Nylon Face & Body
Strap Material:	Steel
Environmental:	Flammability Rated V-2 per UL 94 Operating Temperature -35°C to +65°C
Electrical:	Dielectric Voltage: Withstands 1500V per UL498; Current Limiting: 10kA; Temperature Rise: Max 30°C after 50 cycles OL at 150 percent rated current



• Standards: Conform with UL Standard 943 Class A; NEMA WD-6; ANSI C-73; UL 498; CSA C22.2 No. 42


• Certifications: UL E-13399; CSA LR-57811; NOM 057

Catalog No.	Color	Description	EDP-No.
6899-l	lvory	Duplex GFCI Receptacle, 20A/125V, Decora Plus Style	101425
		(Color matching nylon wallplate and screws included)	

6899-I

## **Features and Benefits**

- Replaces standard receptacle in residential or light commercial installations.
- Protects against ground fault shock hazard wherever electrical contact might provide a path to ground through a human body.
- Can be wired to provide feed-through protection to other outlets on the same circuit.
- Sturdy impact-resistant plastic face.
- Built-in TEST (Black) and RESET (Red) buttons on device face.
- Back and side wired for easy installation.
- Sturdy impact-resistant plastic face.
- Trip threshold meets or exceeds UL requirements for tripping time.
- Silver alloy contacts provide maximum protection.
- Expanded wiring options with nine back-wire holes (two for each line and load connection plus one for ground with an internal clamp).
- Compatible with all Decora devices and wallplates; available in select Decora colors.
- Terminal Accom.: #14-12 AWG
- Terminal ID: Brass-Hot, Green-Ground, Silver-Neutral
- Product ID: Ratings are permanently marked on device

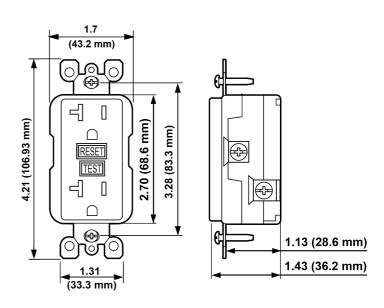

COMMERCIAL GRADE GFCI RECEPTACLE Cat No. 6899

