

NEMA L5-20R



NEMA L6-20R



20A 125V; 20A 250V Industrial Grade

V-MAX
INDUSTRIAL GRADE FLUSH RECEPTACLES

BLACK & WHITE
INDUSTRIAL GRADE PLUGS & CONNECTORS



2311



2313-B



2310



2310-IG



2315



2316

TYPE	PLUG	CONNECTOR	SINGLE FLUSH RECEPTACLE	SINGLE FLUSH IG RECEPTACLE	FLANGED INLET	FLANGED OUTLET
20A 125V, NEMA L5-20P AND L5-20R, 2-P 3-W, Grounding						
Black & White	2311	2313	-	-	-	-
Yellow & White	2311-CY	2313-CY	-	-	-	-
All Black	2311-B	2313-B	2310	-	-	-
All White	-	-	-	-	2315	2316
Orange	-	-	-	2310-IG	-	-
20A 250V, NEMA L6-20P AND L6-20R, 2-P 3-W, Grounding						
Black & White	2321	2323	-	-	-	-
Yellow & White	2321-CY	2323-CY	-	-	-	-
All Black	-	-	2320	-	-	-
All White	-	-	-	-	2325	2326
Orange	-	-	-	2320-IG	-	-

Power Light Plug & Connector

TYPE	PLUG	CONNECTOR
20A 125V NEMA L5-20P & L5-20R, 2-P 3-W		
Factory Installed Green Light Indicates Power Status		
Black & White All Black	2311-PLC 2311-PLB	2313-PLC 2313-PLB

TYPE	PLUG	CONNECTOR
20A 250V NEMA L6-20P & L6-20R, 2-P 3-W		
Factory Installed Green Light Indicates Power Status		
Black & White	2321-PLC	2323-PLC


ELECTRICAL		
DIELECTRIC VOLTAGE	CURRENT INTERR.	TEMP. RISE
Withstands 2000V per UL 498	Full rated current	Max 30°C after 250 cycles of overload at 200% of rated current

MECHANICAL			
TERMINAL I.D.	TERMINAL ACCOMM.	PRODUCT I.D.	CORD GRIP RANGE
Brass, hot	#18 - #10 AWG	Ratings & NEMA I.D. permanently marked on device	.385" - .780"
Grounding White, neutral	Receptacles #14 - #8 AWG		
ENVIRONMENTAL			
FLAMMABILITY		OPERATING TEMP.	
Rated V-2 per UL 94		Receptacles Rated V-0 per UL 94	
-40°C to 60°C			

STANDARDS & CERTIFICATIONS					
NEMA WD-6	ANSI C-73	UL 498	UL Fed Spec Listed WC-596	CSA C22.2 No.42	NOM
✓	✓	✓	#E13393 Plugs, Connectors & Flanged Inlets	#LR-406	#057
			#E13399 Receptacles & Flanged Outlets		


GRAY LEXAN FLIP LID COVER	YELLOW LEXAN FLIP LID COVER	WEATHER-RESISTANT THERMOPLASTIC COVER	302 STAINLESS STEEL
For Inlets and Outlets	For Receptacles	For Receptacles	Single Receptacles
<p>IP64 Rated Includes Gasket and Screws WP2</p>	<p>IP64 Rated Includes Gasket and Screws 7420-CR</p>	<p>Self-Closing Lid Includes Gasket and Screws 4980-GY</p>	<p>40.6mm Dia. Hole 84020-40</p>

PLEASE REQUEST FOR ADDITIONAL WALLPLATE OPTIONS

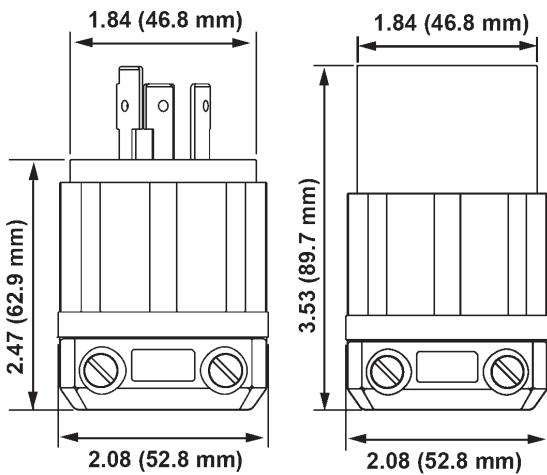


PLUG


CONNECTOR

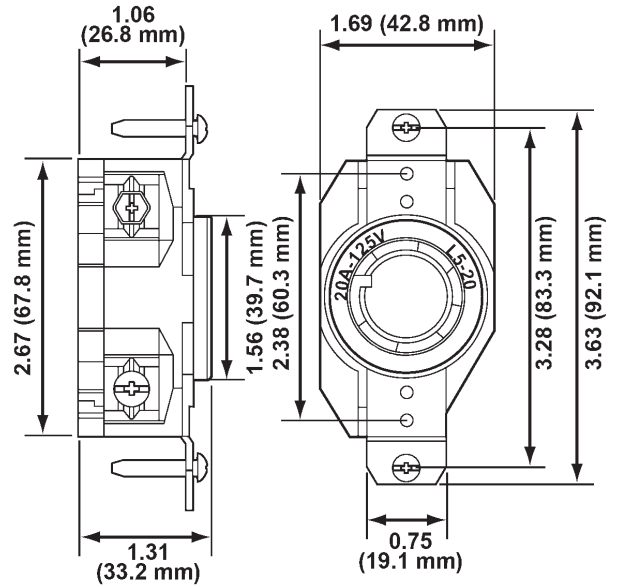

RECEPTACLE

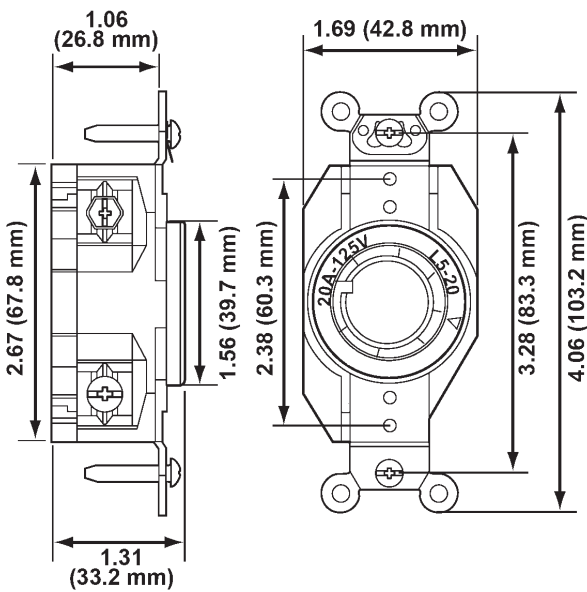

IG RECEPTACLE

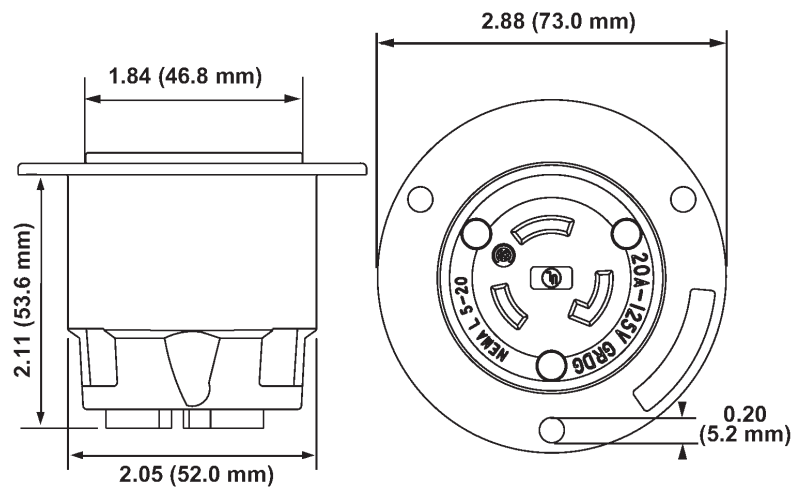

INLETS & OUTLETS

To learn more about B-I-A please visit us at our
WEB site: www.BiaGmbH.com

