



NEMA L8-20R



NEMA L9-20R

20A 480V AC; 20A 600V AC Industrial Grade

V-MAX
INDUSTRIAL GRADE FLUSH RECEPTACLES

BLACK & WHITE
INDUSTRIAL GRADE PLUGS & CONNECTORS




2341



2343



2340



2340-IG





2345



2346

TYPE	PLUG	CONNECTOR	SINGLE FLUSH RECEPTACLE	SINGLE FLUSH IG RECEPTACLE	FLANGED INLET	FLANGED OUTLET
20A 480V AC, NEMA L8-20P AND L8-20R, 2-P 3-W, Grounding						
Black & White	2341	2343	-	-	-	-
Yellow & White	-	-	-	-	-	-
All Black	-	-	2340	-	-	-
All White	-	-	-	-	2345	2346
Orange	-	-	-	2340-IG	-	-
20A 600V AC, NEMA L9-20P AND L9-20R, 2-P 3-W, Grounding						
Black & White	2351	2353	-	-	-	-
Yellow & White	-	-	-	-	-	-
All Black	-	-	2350	-	-	-
All White	-	-	-	-	2355	2356
Orange	-	-	-	2350-IG	-	-

THERMOPLASTIC ELASTOMER BOOTS	
PLUG BOOT	CONNECTOR BOOT
 <p>6031 (Black) 6031-Y (Yellow)</p>	 <p>6032 (Black) 6032-Y (Yellow)</p>



NEMA L8-20P



NEMA L8-20R



NEMA L9-20P







NEMA L9-20R


ELECTRICAL		
DIELECTRIC VOLTAGE	CURRENT INTERRUPT.	TEMP. RISE
Withstands 2000V per UL 498	Full rated current	Max 30°C after 250 cycles of overload at 200% of rated current

MECHANICAL			
TERMINAL I.D.	TERMINAL ACCOMM.	PRODUCT I.D.	CORD GRIP RANGE
Brass, hot	#18 - #10 AWG Receptacles #14 - #8 AWG	Ratings & NEMA I.D. permanently marked on device	.385" - .780"
White, neutral			
ENVIRONMENTAL			
FLAMMABILITY		OPERATING TEMP.	
Rated V-2 per UL 94		2340 & 2340-IG Rated V-0 per UL 94	
-40°C to 60°C			

STANDARDS & CERTIFICATIONS					
NEMA WD-6	ANSI C-73	UL 498	UL Fed Spec Listed WC-596	CSA C22.2 No.42	NOM
✓	✓	✓	#E13393 Plugs, Connectors & Flanged Inlets	#LR-406	#057
			#E13399 Receptacles & Flanged Outlets		


GRAY LEXAN FLIP LID COVER	YELLOW LEXAN FLIP LID COVER	WEATHER-RESISTANT THERMOPLASTIC COVER	302 STAINLESS STEEL
For Inlets and Outlets	For Receptacles	For Receptacles	Single Receptacles
 <p>IP64 Rated Includes Gasket and Screws WP2</p>	 <p>IP64 Rated Includes Gasket and Screws 7420-CR</p>	 <p>Self-Closing Lid Includes Gasket and Screws 4980-GY</p>	 <p>40.6mm Dia. Hole 84020-40</p>

PLEASE REQUEST FOR ADDITIONAL WALLPLATE OPTIONS

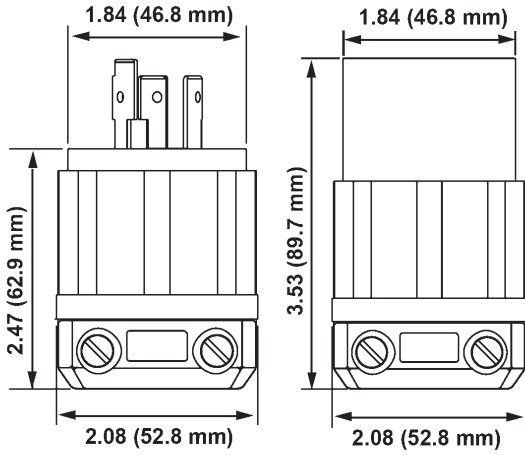


PLUG


CONNECTOR

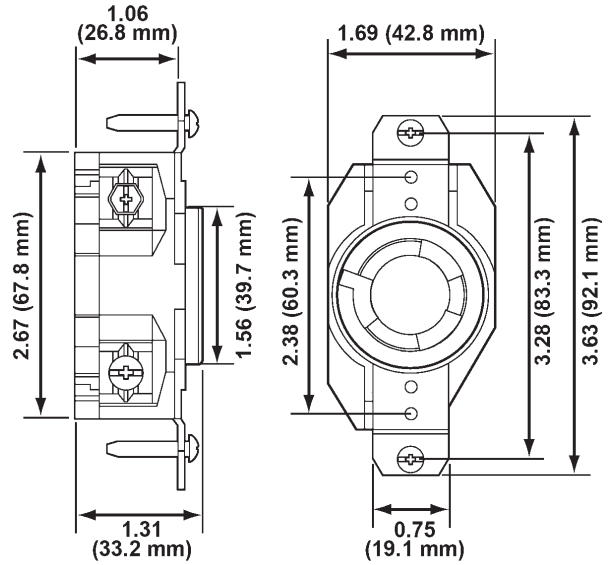

RECEPTACLE

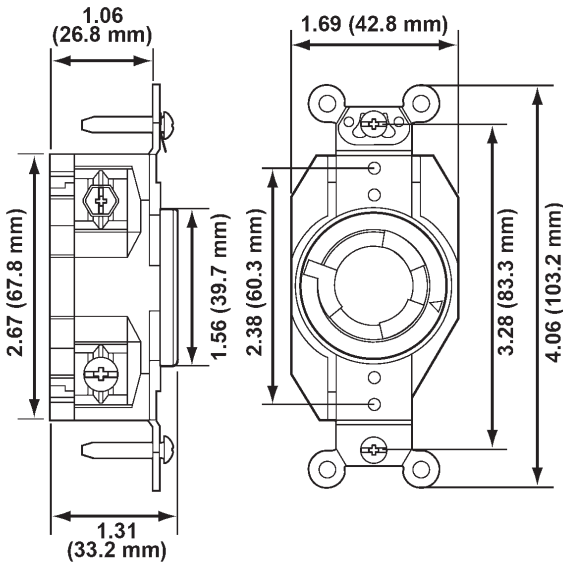

IG RECEPTACLE

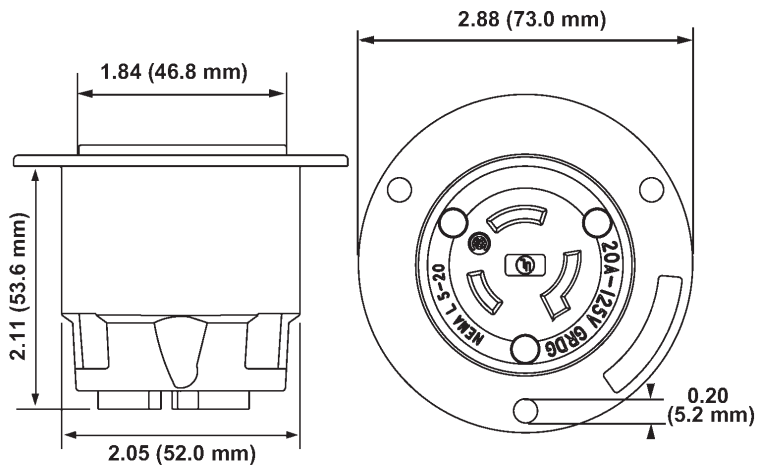

INLETS & OUTLETS

To learn more about B-I-A please visit us at our
WEB site: www.BiaGmbH.com

