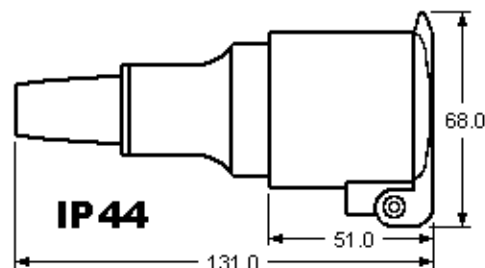


Dimensions = mm

**SCHUKO Vollgummi-Kupplung**

- ◆ Schutzkontakt
- ◆ robuste Industrieausführung
- ◆ zweifach Front-Verschraubung
- ◆ Flächenklemmen
- ◆ genormte Schnappverrastung
- ◆ geöffnete Anschluss-Schrauben
- ◆ IP 44
- ◆ 16A, 250V AC
- ◆ -40°C bis +70°C
- ◆ bis H 07 RN-F 3 G 2.5
- ◆ DIN 49 441-2-AR1, CEE 7, Normblatt VII

**SCHUKO Solid Rubber Connector**

- ◆ safety contact
- ◆ tough quality for industrial use
- ◆ two front-screws
- ◆ screw terminal
- ◆ beaded edge
- ◆ quick assembly
- ◆ IP 44
- ◆ 16A, 250V AC
- ◆ -40°C bis +70°C
- ◆ up to H 07 RN-F 3 G 2.5
- ◆ German Standard

Catalog-No.	Beschreibung	Description	Approvals	Wght/ea	UPE/Pack	EDP-No
351-FD/GU	Federdeckel, Aufhängebügel	Spring Lid, suspens. bow	VDE, öVE	214g	100/10	116648

Further Versions with hinged lid or thermoplastic lid available on request.