


Catalog Number: **5207**
Features Flush Mtg. Receptacle
 Termination: Side
 Face/Body Material: Nylon
 Wire Gauge: up to 4 AWG
 Strap: Steel
 Wallplate/Cover: 54.6 mm Dia.



Catalog Number: **5054-2**
Features Surface Mtg. Receptacle
 Termination: Side
 Face Material: Thermoplastic
 Body Material: Thermoplastic
 Wire Gauge: up to AWG
 Strap: Steel

NEMA 10-30 Industrial Grade Devices

Product Features


Grounding: Non-Grounding
 Amperage: 30 Amp.
 Voltage: 125/250V
 Poles: 3-Poles
 Wire: 3-Wire
 Flamability: Rated V-2 per UL 94
 Operating Temp.: -40°C to 60°C
 NEMA Standard: WD6
 ANSI Standard: C-73
 UL Standard: 498
 AC HP Rating: 2.0



Catalog Number: **9332-P**
Features Angle Plug
 Cord Range: 15.9 - 34.9 mm
 Body Material: Super Tough Nylon
 Wire Gauge: up to AWG
 Blades/Contacts: Solid Brass
 Assembly Screws: Steel, Zinc Plated

ELECTRICAL		
DIELECTRIC VOLTAGE	CURRENT INTERR.	TEMP. RISE
Withstands 2000V per UL 498	Full rated current	30°C max at full rated current after 50 cycles overload at 150% rated current for both AC and DC per UL 498


3 Pole 3 Wire Not Grounded 125V/250V



Ordering Information

Catalog Number	NEMA	Device Color	Description	Weight/ea	VPE/Pack	EDP-No.
5207	10-30R	Black	Flush Mounting Receptacle, UL/CSA	136 g	20/1 ea	120568
5054-2	10-30R	Black	Surface Mounting Receptacle, UL/CSA	364 g	10/1 ea	120569
9332-P	10-30P	Black & White	Angle Plug, UL/CSA	273 g	10/1 ea	120570

Nylon Wallplates			430 Stainless Steel Wallplates		Aluminum Wallplates	Gray Lexan Flip Lid Cover
80728-E	80728-I	80726-I	84028	84026	83028	WP2

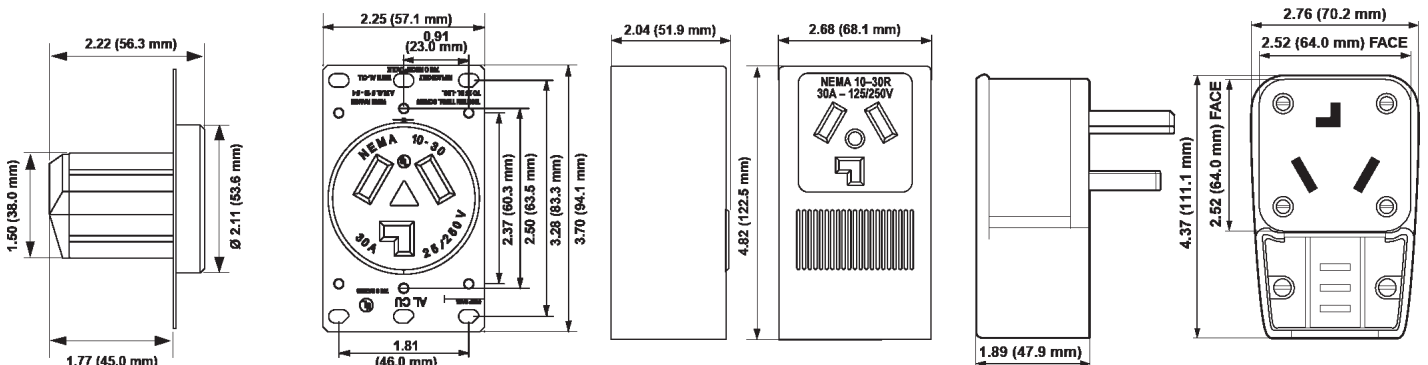

5207

5054-2

9332-P