

Industrial Grade



NEMA 5-15R



NEMA 5-20R



NEMA 6-15R



NEMA 6-20R

| ELECTRICAL | | |
|----------------------------|--------------------|---|
| DIELECTRIC VOLTAGE | CURRENT INTERRUPT. | TEMP. RISE |
| Withstands 2000V per UL498 | Full rated current | Max 30° C after 250 cycles of overload at 200% of rated current |


| MECHANICAL | | |
|---|------------------|--|
| TERMINAL I.D. | TERMINAL ACCOMM. | PRODUCT I.D. |
| Brass, hot Grounding White, neutral | #14 - #10 AWG | Ratings are permanently marked on device |
| ENVIRONMENTAL | | |
| FLAMMABILITY | | OPERATING TEMP. |
| Rated V2 per UL 94 | | -40°C to 60°C |

| STANDARDS & CERTIFICATIONS | | | | | |
|----------------------------|----------|----------|-------------|--------------|------|
| NEMA | ANSI | UL | UL Fed Spec | CSA | NOM |
| WD-6 | C-73 | 498 | WC-596 | C22.2 No. 42 | |
| ✓ | ✓ | #E13399 | #E13399 | #152105 | #057 |
| AC HORSEPOWER RATINGS | | | | | |
| 15A 125V | 15A 250V | 20A 125V | 20A 250V | | |
| .5 | 1.5 | 1.0 | 2.0 | | |

Back & Side Wired, Self-Grounding



5262A



5362-R



5362-IG




5661-I



5352-BLU




5261-CH



5262-GYS

| FACE COLOR | DUPLEX RECEPTACLE Brass Strap 8-Hole Feed-Thru Back Wired Ground Integral Ground | DUPLEX RECEPTACLE Steel Strap 8-Hole Feed-Thru | IG DUPLEX RECEPTACLE SLIM BODY Steel Strap 8-Hole Feed-Thru Self-Grounding Does Not Apply | SINGLE RECEPTACLE Steel Strap | DUPLEX RECEPTACLE NARROW BODY Steel Strap 8-Hole Feed-Thru | SINGLE RECEPTACLE CLOCK HANGER Steel Strap Stainless Steel Plate | DUPLEX RECEPTACLE SLIM BODY Steel Strap 8-Hole Feed-Thru |
|---|--|--|--|----------------------------------|---|---|---|
| 15A 125V, NEMA 5-15R, 2-P 3-W, Grounding | | | | | | | |
| Brown | 5262A | 5262 | 5262-IGB | 5261 | 5252 | 5261-CH | 5262-S |
| Ivory | 5262A-I | 5262-I | 5262-IGI | 5261-I | 5252-I | - | 5262-SI |
| White | 5262A-W | 5262-W | 5262-IGW | 5261-W | 5252-W | - | 5262-SW |
| Gray | 5262A-GY | 5262-GY | 5262-IGG | 5261-GY | 5252-GY | - | 5262-GYS |
| Almond | - | - | - | - | 5252-A | - | - |
| Red | - | 5262-R | 5262-IGR | - | 5252-R | - | 5262-SR |
| Orange | - | - | 5262-IG | - | - | - | - |
| Black | - | 5262-E | - | - | 5252-E | - | - |
| Blue | - | - | - | - | 5252-BLU | - | - |
| 15A 250V, NEMA 6-15R, 2-P 3-W, Grounding | | | | | | | |
| Brown | - | 5662 | - | 5661 | - | - | 5662-S |
| Ivory | - | 5662-I | - | 5661-I | - | - | 5662-SI |
| Almond | - | 5662-A | - | - | - | - | - |
| Orange | - | - | 5662-IG | - | - | - | - |
| 20A 125V, NEMA 5-20R, 2-P 3-W, Grounding | | | | | | | |
| Brown | 5362A | 5362 | 5362-IGB | 5361 | 5352 | 5361-CH | 5362-S |
| Ivory | 5362A-I | 5362-I | 5362-IGI | 5361-I | 5352-I | - | 5362-SI |
| White | 5362A-W | 5362-W | 5362-IGW | 5361-W | 5352-W | - | 5362-SW |
| Gray | 5362A-GY | 5362-GY | 5362-IGG | 5361-GY | 5352-GY | - | 5362-GYS |
| Almond | - | - | 5362-IGA | 5361-A | 5352-A | - | 5362-SR |
| Red | - | 5362-R | 5362-IGR | - | 5352-R | - | - |
| Orange | - | - | 5362-IG | - | - | - | - |
| Black | - | 5362-E | - | - | 5352-E | - | - |
| Blue | - | - | - | - | 5352-BLU | - | - |
| 20A 250V, NEMA 6-20R, 2-P 3-W, Grounding | | | | | | | |
| Brown | - | 5462 | - | 5461 | - | - | 5462-S |
| Ivory | - | 5462-I | - | 5461-I | - | - | 5462-SI |
| Gray | - | 5462-GY | - | - | - | - | - |
| Almond | - | 5462-A | - | 5461-A | - | - | - |
| Orange | - | - | 5462-IG | - | - | - | - |

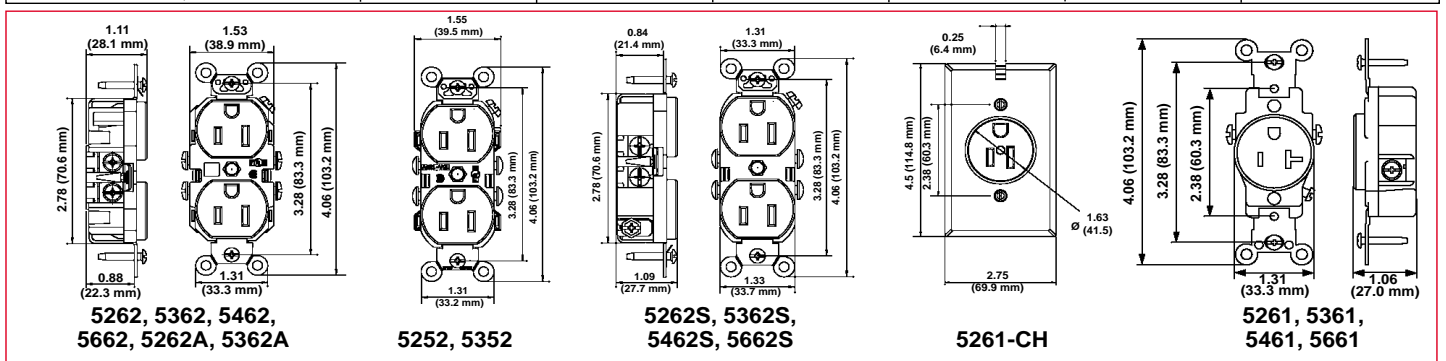



NEMA 5-15R



NEMA 5-20R



NEMA 6-15R



NEMA 6-20R

Industrial Grade

| ELECTRICAL | | |
|----------------------------|--------------------|---|
| DIELECTRIC VOLTAGE | CURRENT INTERRUPT. | TEMP. RISE |
| Withstands 2000V per UL498 | Full rated current | Max 30° C after 250 cycles of overload at 200% of rated current |

| MECHANICAL | | |
|---|------------------|--|
| TERMINAL I.D. | TERMINAL ACCOMM. | PRODUCT I.D. |
| Brass, hot Grounding White, neutral | #14 - #10 AWG | Ratings are permanently marked on device |
| ENVIRONMENTAL | | |
| FLAMMABILITY | | OPERATING TEMP. |
| Rated V2 per UL 94 | | -40°C to 60°C |

| STANDARDS & CERTIFICATIONS | | | | | |
|----------------------------|----------|----------|-------------|--------------|------|
| NEMA | ANSI | UL | UL Fed Spec | CSA | NOM |
| WD-6 | C-73 | 498 | WC-596 | C22.2 No. 42 | |
| | | #E13399 | #E13399 | #152105 | #057 |
| AC HORSEPOWER RATINGS | | | | | |
| 15A 125V | 15A 250V | 20A 125V | 20A 250V | | |
| .5 | 1.5 | 1.0 | 2.0 | | |

Side Wired, Self-Grounding



5242-W



5342-I



5251



5351-I

| FACE COLOR | DUPLEX RECEPTACLE NARROW BODY | SINGLE RECEPTACLE |
|---|---|-------------------------------|
| 15A 125V, NEMA 5-15R, 2-P 3-W, Grounding | | |
| Brown Ivory White Gray Red | 5242 5242-I 5242-W 5242-GY 5242-R | 5251 5251-I - - - |
| 15A 250V, NEMA 6-15R, 2-P 3-W, Grounding | | |
| Brown Ivory White | - - - | 5651 5651-I 5651-W |
| DUAL VOLTAGE 15A 125V, NEMA 5-15R, 15A 250V, NEMA 6-15R, 2-P 3-W, Grounding - Back & Side Wired | | |
| Brown Ivory | 5292 5292-I | - - |
| 20A 125V, NEMA 6-20R, 2-P 3-W, Grounding | | |
| Brown Ivory White Gray Red | 5342 5342-I 5342-W 5342-GY 5342-R | 5351 5351-I - - - |

| NYLON WALLPLATES | | | | 302 STAINLESS STEEL WALLPLATES | | | |
|------------------|----------|---------|-------|--------------------------------|----------|----------|----------|
| | | | | | | | |
| 80703-I | 80704-GY | 80716-I | 80730 | 84003-40 | 84004-40 | 84016-40 | 84030-40 |

FOR ADDITIONAL WALLPLATE OPTIONS SEE SECTION Q

