


LINE CORDS

SHIELDED AND UNSHIELDED PVC

TYPES SVT, SJT
UL LISTED, CSA CERTIFIED

CORD APPLICATIONS:

- Business Machines
- Point-Of-Sale Terminals
- Computers and Peripheral Equipment
- OEM Equipment

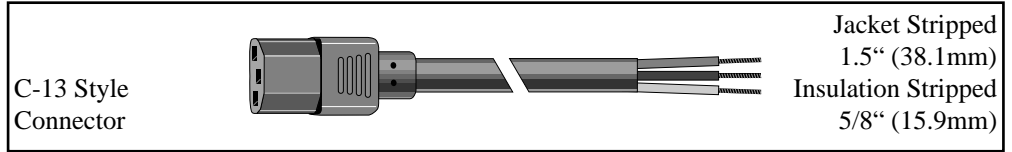

CHARACTERISTICS

Operating Temperature:

- 60° C

Voltage Rating:

- 125 Volt

Color Description:


- Color Code: Blue, Brown, Green/Yellow (CEE)
- Jacket Color: Black

Product Description:

- Conductor: Stranded Bare Copper
- Insulation: Color-Coded PVC
- Shield (when specified): Aluminum/Polyester Foil Facing Inward With Tinned Copper Drain Wire
- Jacket: PVC

UNSHIELDED - STRAIGHT PLUGS

| Part Number | Length | | AWG | Conductor | | Diameter | | Power Watts | Rating Amps | Cord Type | |
|-------------|---------|-----|-----|-----------------|--------|----------|------|-------------|-------------|-----------|-----|
| | Ft.-in. | m | | mm ² | Strand | In. | mm | | | | |
| 523 | 7-6 | 2.3 | 18 | 0.82 | 41/34 | 41x0.16 | 0.25 | 6.4 | 1250 | 10 | SVT |
| 511 | 6-7 | 2 | 18 | 0.82 | 41/34 | 41x0.16 | 0.33 | 8.3 | 1250 | 10 | SJT |
| 512 | 9-10 | 3 | 18 | 0.82 | 41/34 | 41x0.16 | 0.33 | 8.3 | 1250 | 10 | SJT |
| 513 | 6-7 | 2 | 16 | 1.31 | 65/34 | 65x0.16 | 0.35 | 8.9 | 1625 | 13 | SJT |
| 514 | 9-10 | 3 | 16 | 1.31 | 65/34 | 65x0.16 | 0.35 | 8.9 | 1625 | 13 | SJT |

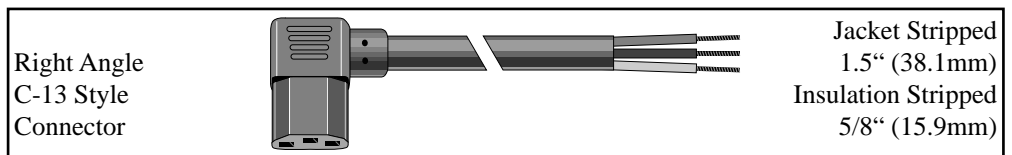

SHIELDED - RIGHT ANGLE PLUG

| Part Number | Length | | AWG | Conductor | | Diameter | | Power Watts | Rating Amps | Cord Type | |
|-------------|---------|---|-----|-----------------|--------|----------|------|-------------|-------------|-----------|-----|
| | Ft.-in. | m | | mm ² | Strand | In. | mm | | | | |
| 521F | 6-7 | 2 | 14 | 2.08 | 41/30 | 41x0.25 | 0.40 | 10.1 | 1825 | 15 | SJT |

SPECIFICATIONS

- UL Standard 817
- UL Standard 62
- CSA C22.2 No. 21
- CSA C22.2 No. 49



LISTED



Certified

Canadian Standards Association

AVAILABILITY


- 25 Piece Packages

JUMPER CORDS & PARALLEL LAMP CORD SHIELDED AND UNSHIELDED PVC

TYPES SVT, SJT, SPT-1
UL LISTED, CSA CERTIFIED

CORD APPLICATIONS:

- Business Machines
- Point-Of-Sale Terminals
- Computers and Peripheral Equipment
- OEM Equipment

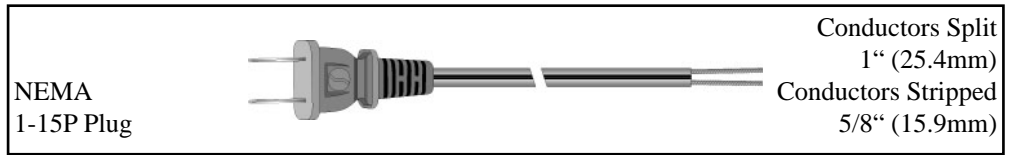

CHARACTERISTICS

Operating Temperature:

- 60° C

Voltage Rating:

- 125 Volt

Color Description:


- Color Code: Blue, Brown, Green/Yellow (CEE)
- Jacket Color: Black
601B Available with White or Slate Jacket Only

Product Description:

- Conductor: Stranded Bare Copper
- Insulation: Color-Coded PVC
- Shield (when specified): Aluminum/Polyester Foil Facing Inward With Tinned Copper Drain Wire
- Jacket: PVC

PARALLEL LAMP CORD

| Part Number | Length | | AWG | Conductor | | | Diameter | | Power Watts | Rating Amps | Cord Type |
|-------------|---------|-----|-----|-----------------|--------|---------|----------------|--------------|-------------|-------------|-----------|
| | Ft.-in. | m | | mm ² | Strand | mm | In. | mm | | | |
| 601B | 6-0 | 1.8 | 18 | 0.82 | 41/34 | 41x0.16 | 0.11 x 0.22 | 2.8 x 5.6 | 1250 | 10 | SPT-1 |

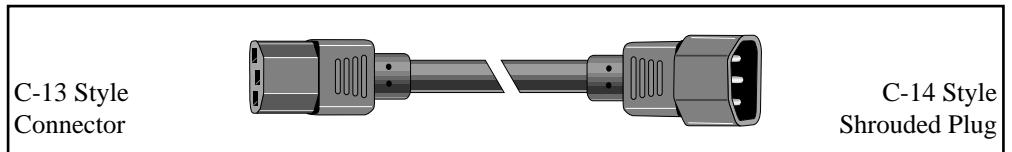

SHIELDED - ELECTRONIC JUMPER CORD

| Part Number | Length | | AWG | Conductor | | | Diameter | | Power Watts | Rating Amps | Cord Type |
|-------------|---------|---|-----|-----------------|--------|---------|----------|-----|-------------|-------------|-----------|
| | Ft.-in. | m | | mm ² | Strand | mm | In. | mm | | | |
| 560F† | 3-3 | 1 | 18 | 0.82 | 41/34 | 41x0.16 | 0.27 | 6.8 | 1250 | 10 | SVT |

UNSHIELDED - ELECTRONIC JUMPER CORDS

| Part Number | Length | | AWG | Conductor | | | Diameter | | Power Watts | Rating Amps | Cord Type |
|-------------|---------|---|-----|-----------------|--------|---------|----------|-----|-------------|-------------|-----------|
| | Ft.-in. | m | | mm ² | Strand | mm | In. | mm | | | |
| 551† | 3-3 | 1 | 18 | 0.82 | 41/34 | 41x0.16 | 0.33 | 8.4 | 1250 | 10 | SJT |
| 552† | 3-3 | 1 | 16 | 1.31 | 65/34 | 65x0.16 | 0.35 | 9.0 | 1625 | 13 | SJT |

SPECIFICATIONS

- UL Standard 817
- UL Standard 62
- CSA C22.2 No. 21
- CSA C22.2 No. 49
- † UL Recognized Wiring Harness



LISTED



Certified

Canadian Standards Association



Recognized Component

Underwriters Laboratories Inc.

AVAILABILITY

- 25 Piece Packages
- 601B In Stock, 100 Piece Packages

POWER SUPPLY CORDS PVC, RUBBER AND NEOPRENE

TYPES SJ, SJT, SJO, SV, SVT
UL LISTED, CSA CERTIFIED

CORD APPLICATIONS:

- Business Machines
- Point-Of-Sale Terminals
- Computers and Peripheral Equipment
- OEM Equipment

CHARACTERISTICS

Operating Temperature:

- 60° C

Voltage Rating:

- 125 Volt

Color Description:

- Color Code: Black, White, Green, or Green/Yellow
- Jacket Color: Black
- * Jacket Color: Gray

Product Description:

- Conductor: Stranded Bare Copper
- Insulation: Color-Coded PVC Rubber or Neoprene
- Jacket: PVC, Rubber or Neoprene

SPECIFICATIONS

- UL Standard 817
- UL Standard 62
- CSA C22.2 No. 21
- CSA C22.2 No. 49



LISTED




Certified

Canadian Standards Association

AVAILABILITY

- 25 Piece Packages
- Items Marked With **B** Are In Stock: 100 Piece Packages

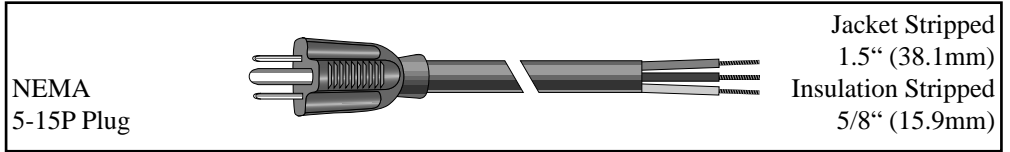

TYPE SJT PVC, SJ RUBBER and SJO NEOPRENE

| Part Number | Length | | AWG | Conductor | | | Diameter | | Power Watts | Rating Amps | Cord Type |
|-------------|---------|-----|-----|-----------------|--------|---------|----------|-----|-------------|-------------|-----------|
| | Ft.-in. | m | | mm ² | Strand | mm | In. | mm | | | |
| 615 | 6-0 | 1.8 | 18 | 0.81 | 16/30 | 16x0.25 | 0.33 | 8.4 | 1250 | 10 | SJ |
| 780* | 6-0 | 1.8 | 18 | 0.81 | 16/30 | 16x0.25 | 0.33 | 8.4 | 1250 | 10 | SJT |
| 780B* | 6-0 | 1.8 | 18 | 0.81 | 16/30 | 16x0.25 | 0.33 | 8.4 | 1250 | 10 | SJT |
| 778 | 8-0 | 2.4 | 18 | 0.81 | 16/30 | 16x0.25 | 0.33 | 8.4 | 1250 | 10 | SJ |
| 779* | 8-0 | 2.4 | 18 | 0.81 | 16/30 | 16x0.25 | 0.33 | 8.4 | 1250 | 10 | SJT |
| 779B* | 8-0 | 2.4 | 18 | 0.81 | 16/30 | 16x0.25 | 0.33 | 8.4 | 1250 | 10 | SJT |
| 781 | 8-0 | 2.4 | 18 | 0.81 | 16/30 | 16x0.25 | 0.33 | 8.4 | 1250 | 10 | SJO |
| 616 | 9-0 | 2.7 | 18 | 0.81 | 16/30 | 16x0.25 | 0.33 | 8.4 | 1250 | 10 | SJ |
| 782 | 12-0 | 3.7 | 18 | 0.81 | 16/30 | 16x0.25 | 0.33 | 8.4 | 1250 | 10 | SJ |

SJ RUBBER

| Part Number | Length | | AWG | Conductor | | | Diameter | | Power Watts | Rating Amps | Cord Type |
|-------------|---------|-----|-----|-----------------|--------|---------|----------|-----|-------------|-------------|-----------|
| | Ft.-in. | m | | mm ² | Strand | mm | In. | mm | | | |
| 783 | 9-0 | 2.7 | 16 | 1.31 | 26/30 | 26x0.25 | 0.35 | 8.9 | 1625 | 13 | SJ |
| 784 | 12-0 | 3.7 | 16 | 1.31 | 26/30 | 26x0.25 | 0.35 | 8.9 | 1625 | 13 | SJ |

TYPE SV RUBBER and SVT PVC


| Part Number | Length | | AWG | Conductor | | | Diameter | | Power Watts | Rating Amps | Cord Type |
|-------------|---------|-----|-----|-----------------|--------|---------|----------|-----|-------------|-------------|-----------|
| | Ft.-in. | m | | mm ² | Strand | mm | In. | mm | | | |
| 775 | 6-0 | 1.8 | 18 | 0.824 | 41/34 | 41x0.16 | 0.26 | 6.6 | 1250 | 10 | SV |
| 776 | 8-0 | 2.4 | 18 | 0.824 | 41/34 | 41x0.16 | 0.26 | 6.6 | 1250 | 10 | SV |
| 777* | 6-0 | 1.8 | 18 | 0.824 | 41/34 | 41x0.16 | 0.25 | 6.4 | 1250 | 10 | SVT |
| 777B* | 6-0 | 1.8 | 18 | 0.824 | 41/34 | 41x0.16 | 0.25 | 6.4 | 1250 | 10 | SVT |
| 787* | 8-0 | 2.4 | 18 | 0.824 | 41/34 | 41x0.16 | 0.25 | 6.4 | 1250 | 10 | SVT |
| 787B* | 8-0 | 2.4 | 18 | 0.824 | 41/34 | 41x0.16 | 0.25 | 6.4 | 1250 | 10 | SVT |

POWER SUPPLY CORDS PVC, RUBBER AND NEOPRENE

TYPES SJ, SJT, SVT
UL LISTED, CSA CERTIFIED

CORD APPLICATIONS:

- Business Machines
- Point-Of-Sale Terminals
- Computers and Peripheral Equipment
- OEM Equipment

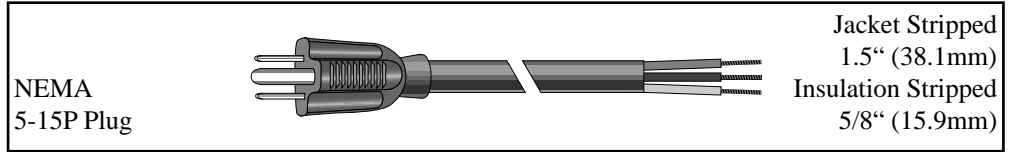

CHARACTERISTICS

Operating Temperature:

- 60° C

Voltage Rating:

- 125 Volt

Color Description:

- Color Code: Blue, Brown, Green/Yellow (CEE)

* Black, White, Green, or Green/Yellow

- Jacket Color: Black

Product Description:

- Conductor: Stranded Bare Copper
- Insulation: Color-Coded PVC or Rubber
- Shield (when specified): Aluminum/Polyester Foil Facing Inward With Tinned Copper Drain Wire
- Jacket: PVC or Rubber

SHIELDED - TYPE SVT PVC

| Part Number | Length | | AWG | Conductor | | | Diameter | | Power Watts | Rating Amps | Cord Type |
|-------------|---------|---|-----|-----------------|--------|---------|----------|-----|-------------|-------------|-----------|
| | Ft.-in. | m | | mm ² | Strand | mm | In. | mm | | | |
| 507F | 6-7 | 2 | 18 | 0.82 | 41/34 | 41x0.16 | 0.27 | 6.8 | 1250 | 10 | SVT |
| 508F | 9-10 | 3 | 18 | 0.82 | 41/34 | 41x0.16 | 0.27 | 6.8 | 1250 | 10 | SVT |

UNSHIELDED - TYPE SJT PVC

| Part Number | Length | | AWG | Conductor | | | Diameter | | Power Watts | Rating Amps | Cord Type |
|-------------|---------|---|-----|-----------------|--------|---------|----------|-----|-------------|-------------|-----------|
| | Ft.-in. | m | | mm ² | Strand | mm | In. | mm | | | |
| 501 | 6-7 | 2 | 18 | 0.82 | 41/34 | 41x0.16 | 0.33 | 8.3 | 1250 | 10 | SJT |
| 501B | 6-7 | 2 | 18 | 0.82 | 41/34 | 41x0.16 | 0.33 | 8.3 | 1250 | 10 | SJT |
| 502 | 9-10 | 3 | 18 | 0.82 | 41/34 | 41x0.16 | 0.33 | 8.3 | 1250 | 10 | SJT |
| 502B | 9-10 | 3 | 18 | 0.82 | 41/34 | 41x0.16 | 0.33 | 8.3 | 1250 | 10 | SJT |
| 503 | 6-7 | 2 | 16 | 1.31 | 65/34 | 65x0.16 | 0.35 | 8.9 | 1625 | 13 | SJT |
| 504 | 9-10 | 3 | 16 | 1.31 | 65/34 | 65x0.16 | 0.35 | 8.9 | 1625 | 13 | SJT |
| 505 | 6-7 | 2 | 14 | 2.08 | 41/30 | 41x0.25 | 0.38 | 9.6 | 1875 | 15 | SJT |
| 505B | 6-7 | 2 | 14 | 2.08 | 41/30 | 41x0.25 | 0.38 | 9.6 | 1875 | 15 | SJT |
| 506 | 9-10 | 3 | 14 | 2.08 | 41/30 | 41x0.25 | 0.38 | 9.6 | 1875 | 15 | SJT |

UNSHIELDED - TYPE SJ RUBBER

| Part Number | Length | | AWG | Conductor | | | Diameter | | Power Watts | Rating Amps | Cord Type |
|-------------|---------|-----|-----|-----------------|--------|---------|----------|-----|-------------|-------------|-----------|
| | Ft.-in. | m | | mm ² | Strand | mm | In. | mm | | | |
| 788* | 9-0 | 2.7 | 14 | 2.08 | 41/30 | 41x0.25 | 0.38 | 9.6 | 1875 | 15 | SJ |
| 789* | 15-0 | 4.6 | 14 | 2.08 | 41/30 | 41x0.25 | 0.38 | 9.6 | 1875 | 15 | SJ |

SPECIFICATIONS

- UL Standard 817
- UL Standard 62
- CSA C22.2 No. 21
- CSA C22.2 No. 49



LISTED



Certified

Canadian Standards Association

AVAILABILITY

- 25 Piece Packages
- Items Marked With **B** Are In Stock: 100 Piece Packages

DETACHABLE POWER SUPPLY CORD SETS SHIELDED AND UNSHIELDED PVC

TYPES SVT, SJT
UL LISTED, CSA CERTIFIED

CORD APPLICATIONS:

- Business Machines
- Point-Of-Sale Terminals
- Computers and Peripheral Equipment
- OEM Equipment

CHARACTERISTICS

Operating Temperature:

- 60° C

Voltage Rating:

- 125 Volt

Color Description:

- Color Code: Blue, Brown, Green/Yellow (CEE)
 - * Color Code: Black, White, Green or Green/Yellow
 - Jacket Color: Black
- Part #543 also available in Gray

Product Description:

- Conductor: Stranded Bare Copper
- Insulation: Color-Coded PVC
- Shield (when specified): Aluminum/Polyester Foil Facing Inward With Drain Wire
- Jacket: PVC


SPECIFICATIONS

- UL Standard 817
- UL Standard 62
- CSA C22.2 No. 21
- CSA C22.2 No. 49



AVAILABILITY


- 25 Piece Packages
- Items Marked With **B** Are In Stock: 100 Piece Packages

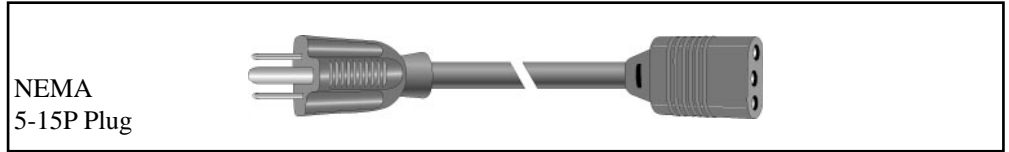

UNSHIELDED - STRAIGHT PLUGS

| Part Number | Length | | Conductor | | | Diameter | | Power Watts | Rating Amps | Cord Type | |
|-------------|---------|-----|-----------|-----------------|--------|----------|------|-------------|-------------|-----------|-----|
| | Ft.-in. | m | AWG | mm ² | Strand | mm | In. | mm | | | |
| 543* | 7-6 | 2.3 | 18 | 0.82 | 41/34 | 41x0.16 | 0.25 | 6.4 | 875 | 7 | SVT |

Item 543 Also Has a Gray Jacket and Meets UL 817

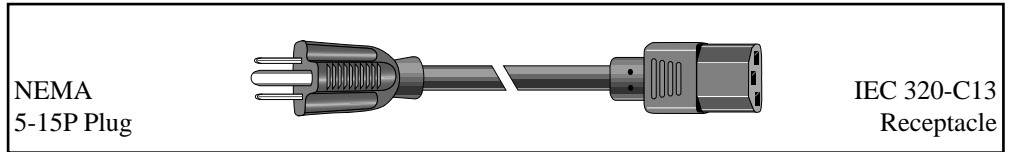

UNSHIELDED - STRAIGHT PLUGS

| Part Number | Length | | Conductor | | | Diameter | | Power Watts | Rating Amps | Cord Type | |
|-------------|---------|-----|-----------|-----------------|--------|----------|------|-------------|-------------|-----------|-----|
| | Ft.-in. | m | AWG | mm ² | Strand | mm | In. | mm | | | |
| 545* | 7-6 | 2.3 | 18 | 0.82 | 41/34 | 41x0.16 | 0.25 | 6.4 | 1250 | 10 | SVT |
| 545B* | 7-6 | 2.3 | 18 | 0.82 | 41/34 | 41x0.16 | 0.25 | 6.4 | 1250 | 10 | SVT |
| 546 | 7-6 | 2.3 | 16 | 1.31 | 65/34 | 65x0.16 | 0.35 | 9.0 | 1625 | 13 | SJT |

SHIELDED - STRAIGHT PLUGS

| Part Number | Length | | Conductor | | | Diameter | | Power Watts | Rating Amps | Cord Type | |
|-------------|---------|---|-----------|-----------------|--------|----------|------|-------------|-------------|-----------|-----|
| | Ft.-in. | m | AWG | mm ² | Strand | mm | In. | mm | | | |
| 547F | 6-7 | 2 | 18 | 0.82 | 41/34 | 41x0.16 | 0.27 | 6.8 | 1250 | 10 | SVT |
| 548F | 9-10 | 3 | 18 | 0.82 | 41/34 | 41x0.16 | 0.27 | 6.8 | 1250 | 10 | SVT |
| 531F | 6-7 | 2 | 18 | 0.82 | 41/34 | 41x0.16 | 0.34 | 8.6 | 1250 | 10 | SJT |
| 532F | 9-10 | 3 | 18 | 0.82 | 41/34 | 41x0.16 | 0.34 | 8.6 | 1250 | 10 | SJT |
| 536F | 9-10 | 3 | 14 | 2.08 | 41/30 | 41x0.25 | 0.40 | 10.1 | 1875 | 15 | SJT |

UNSHIELDED - STRAIGHT PLUGS


| Part Number | Length | | Conductor | | | Diameter | | Power Watts | Rating Amps | Cord Type | |
|-------------|---------|-----|-----------|-----------------|--------|----------|------|-------------|-------------|-----------|-----|
| | Ft.-in. | m | AWG | mm ² | Strand | mm | In. | mm | | | |
| 531* | 6-7 | 2 | 18 | 0.82 | 41/34 | 41x0.16 | 0.33 | 8.3 | 1250 | 10 | SJT |
| 531B* | 6-7 | 2 | 18 | 0.82 | 41/34 | 41x0.16 | 0.33 | 8.3 | 1250 | 10 | SJT |
| 535* | 7-7 | 2.3 | 18 | 0.82 | 41/34 | 41x0.16 | 0.25 | 6.4 | 1250 | 10 | SVT |
| 535B* | 7-7 | 2.3 | 18 | 0.82 | 41/34 | 41x0.16 | 0.25 | 6.4 | 1250 | 10 | SVT |
| 532* | 9-10 | 3 | 18 | 0.82 | 41/34 | 41x0.16 | 0.33 | 8.3 | 1250 | 10 | SJT |
| 532B* | 9-10 | 3 | 18 | 0.82 | 41/34 | 41x0.16 | 0.33 | 8.3 | 1250 | 10 | SJT |
| 533 | 6-7 | 2 | 16 | 1.31 | 65/34 | 65x0.16 | 0.35 | 9.0 | 1625 | 13 | SJT |
| 534* | 9-10 | 3 | 16 | 1.31 | 65/34 | 65x0.16 | 0.35 | 9.0 | 1625 | 13 | SJT |
| 534B* | 9-10 | 3 | 16 | 1.31 | 65/34 | 65x0.16 | 0.35 | 9.0 | 1625 | 13 | SJT |

DETACHABLE POWER SUPPLY CORD SETS SHIELDED AND UNSHIELDED PVC

TYPES SVT, SJT
UL LISTED, CSA CERTIFIED

CORD APPLICATIONS:

- Business Machines
- Point-Of-Sale Terminals
- Computers and Peripheral Equipment
- OEM Equipment

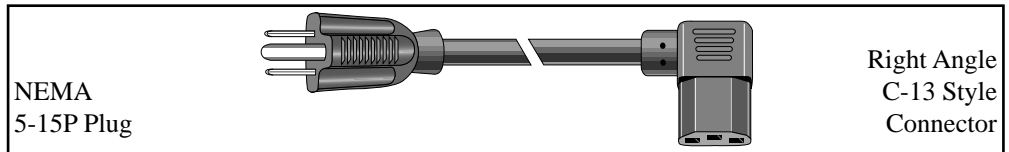

CHARACTERISTICS

Operating Temperature:

- 60° C

Voltage Rating:

- 125 Volt

Color Description:

- Color Code: Blue, Brown, Green/Yellow (CEE)
- Jacket Color: Black

Product Description:

- Conductor: Stranded Bare Copper
- Insulation: Color-Coded PVC
- Shield (when specified): Aluminum/Polyester Foil Facing Inward With Tinned Copper Drain Wire
- Jacket: PVC

SHIELDED - RIGHT ANGLE PLUG

| Part Number | Length | | AWG | Conductor | | | Diameter | | Power Watts | Rating Amps | Cord Type |
|-------------|---------|---|-----|-----------------|--------|---------|----------|-----|-------------|-------------|-----------|
| | Ft.-in. | m | | mm ² | Strand | mm | In. | mm | | | |
| 550F | 9-10 | 3 | 18 | 0.82 | 41/34 | 41x0.16 | 0.27 | 6.8 | 1250 | 10 | SVT |

UNSHIELDED - RIGHT ANGLE PLUGS

| Part Number | Length | | AWG | Conductor | | | Diameter | | Power Watts | Rating Amps | Cord Type |
|-------------|---------|---|-----|-----------------|--------|---------|----------|-----|-------------|-------------|-----------|
| | Ft.-in. | m | | mm ² | Strand | mm | In. | mm | | | |
| 537 | 6-7 | 2 | 18 | 0.82 | 41/34 | 41x0.16 | 0.33 | 8.3 | 1250 | 10 | SJT |
| 537B | 6-7 | 2 | 18 | 0.82 | 41/34 | 41x0.16 | 0.33 | 8.3 | 1250 | 10 | SJT |
| 538 | 9-10 | 3 | 18 | 0.82 | 41/34 | 41x0.16 | 0.33 | 8.3 | 1250 | 10 | SJT |
| 540 | 9-10 | 3 | 16 | 1.31 | 65/34 | 65x0.16 | 0.35 | 9.0 | 1625 | 13 | SJT |

SPECIFICATIONS

- UL Standard 817
- UL Standard 62
- CSA C22.2 No. 21
- CSA C22.2 No. 49



LISTED



Certified

Canadian Standards Association

AVAILABILITY


- 25 Piece Packages
- Items Marked With **B** Are In Stock: 100 Piece Packages

POWER SUPPLY CORD SETS MEDICAL GRADE

**TYPES SJT
UL LISTED, CSA CERTIFIED**

MEDICAL GRADE CORD APPLICATIONS:

- In All Medical Environments Where Positive Ground is Critical to Reduce Shock and Sparks
- On X-Ray, Diagnostic and Operating Equipment
- On IV's, Blood Analyzers, Bedside Motors and Other Bio-Medical Equipment

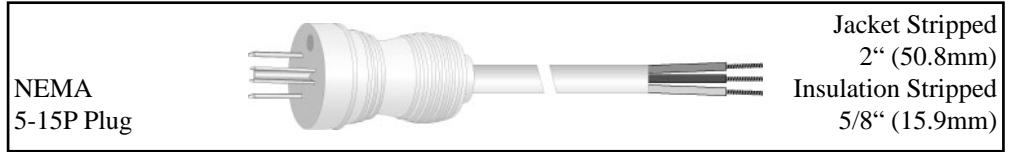

TYPE SJT PVC CORD

| Part Number | Length | | AWG | Conductor | | | Diameter | | Power Watts | Rating Amps | Jacket Color | Plug Color | Conn. Color |
|-------------|---------|---|-----|-----------------|--------|---------|----------|-----|-------------|-------------|--------------|------------|-------------|
| | Ft.-in. | m | | mm ² | Strand | mm | In. | mm | | | | | |
| 801 | 10-0 | 3 | 18 | 1.20 | 43/34 | 43x0.16 | 0.31 | 7.8 | 1250 | 10 | Black | Clear | --- |
| 802 | 10-0 | 3 | 18 | 1.20 | 43/34 | 43x0.16 | 0.31 | 7.8 | 1250 | 10 | Gray | Gray | --- |

CHARACTERISTICS

Operating Temperature:

- -20°C to 60° C

Voltage Rating:


- 125 Volt

Color Description:

- Color Code: Black, White, Green
- Jacket Color: Black or Gray
- Plug Color: Black, Clear, Gray
- Connector Color: Black, Clear, Gray

Product Description:

- Conductor: Stranded Bare Copper
- Insulation: Color-Coded PVC
- Jacket: PVC

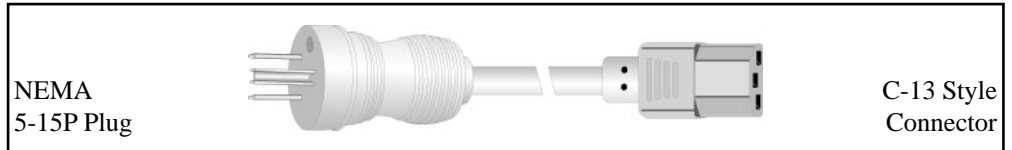

TYPE SJT PVC CORD SET

| Part Number | Length | | AWG | Conductor | | | Diameter | | Power Watts | Rating Amps | Jacket Color | Plug Color | Conn. Color |
|-------------|---------|---|-----|-----------------|--------|---------|----------|-----|-------------|-------------|--------------|------------|-------------|
| | Ft.-in. | m | | mm ² | Strand | mm | In. | mm | | | | | |
| 820 | 10-0 | 3 | 18 | 1.20 | 43/34 | 43x0.16 | 0.31 | 7.8 | 1250 | 10 | Black | Clear | Black |
| 821 | 10-0 | 3 | 18 | 1.20 | 43/34 | 43x0.16 | 0.31 | 7.8 | 1250 | 10 | Gray | Gray | Gray |
| 822 | 10-0 | 3 | 18 | 1.20 | 43/34 | 43x0.16 | 0.31 | 7.8 | 1250 | 10 | Gray | Clear | Clear |
| 830 | 10-0 | 3 | 16 | 1.50 | 68/34 | 68x0.16 | 0.33 | 8.5 | 1625 | 13 | Black | Clear | Black |
| 831 | 10-0 | 3 | 16 | 1.50 | 68/34 | 68x0.16 | 0.33 | 8.5 | 1625 | 13 | Gray | Gray | Gray |
| 832 | 10-0 | 3 | 16 | 1.50 | 68/34 | 68x0.16 | 0.33 | 8.5 | 1625 | 13 | Gray | Clear | Clear |

SPECIFICATIONS

- UL Standard 817
- UL Standard 62
- Passes UL VW-1 Flame Test
- CSA C22.2 No. 21
- CSA C22.2 No. 49
- Passes CSA FT2 Flame Test



LISTED



Certified

Canadian Standards Association

AVAILABILITY

- 25 Piece Packages


EXTENSION CORD SETS

RUBBER

TYPES SJ
UL LISTED, CSA CERTIFIED

CORD APPLICATIONS:

- Business Machines
- Point-Of-Sale Terminals
- Computers and Peripheral Equipment
- OEM Equipment

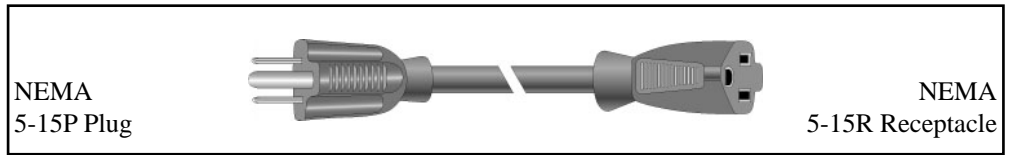

CHARACTERISTICS

Operating Temperature:

- 60° C

Voltage Rating:

- 125 Volt

Color Description:

- Color Code: Black, White, Green
- Jacket Color: Black

Product Description:

- Conductor: Stranded Bare Copper
- Insulation: Color-Coded Rubber
- Jacket: Rubber

TYPE SJ RUBBER

| Part Number | Length | | AWG | Conductor | | Diameter | | Power Watts | Rating Amps | Cord Type | |
|-------------|---------|-----|-----|-----------------|--------|----------|------|-------------|-------------|-----------|----|
| | Ft.-in. | m | | mm ² | Strand | In. | mm | | | | |
| 633 | 10-0 | 3.1 | 16 | 1.32 | 26/30 | 26x0.25 | 0.35 | 8.9 | 1625 | 13 | SJ |
| 640 | 15-0 | 4.6 | 16 | 1.32 | 26/30 | 26x0.25 | 0.35 | 8.9 | 1625 | 13 | SJ |

SPECIFICATIONS

- UL Standard 817
- UL Standard 62
- CSA C22.2 No. 21
- CSA C22.2 No. 49



LISTED



Certified

Canadian Standards Association

AVAILABILITY

- Item 633 - 25 Piece Pack,
- Item 640 - Individually Bagged