

Specify **XTRA GUARD® 3** for direct burial applications without the costly use of conduit.

XTRA GUARD® 3 has five times the water resistance of conventional PVC cable and has a specially formulated ethylene propylene copolymer jacket for outstanding service life and ultraviolet light stability.

XTRA GUARD® 3 is available in both 300 Volt and 600 Volt cable ratings.

APPLICATIONS

- Inter-building Communications
- Satellite Communications Equipment
- Land Irrigation Systems
- Outdoor Security Systems
- Outdoor Scoreboards and Displays
- Pipeline Sensor Controls



FIT® TUBING RECOMMENDATION

FIT®-700 – Bonding, Mastic Lined, Irradiated Polyolefin
 (See [Doc#7371](#) Page 126 for Product Specifications)


Product Type	Page Number (s)
Multiconductor, Unshielded 300 Volt	56
Multiconductor, Foil Shield 300 Volt	57, 58
Multiconductor, Foil Shield 600 Volt	59
Multiconductor, SUPRASHIELD® (Foil/Braid) 300 Volt	60
Multipair, Foil Shield 300 Volt	61
Multipair, SUPRASHIELD® (Foil/Braid) 300 Volt	62

MULTICONDUCTOR, UNSHIELDED
EXTRA-DURABLE OUTDOOR DIRECT-BURIAL JACKET

DIRECT BURIAL
300 VOLT

CHOOSE XTRA•GUARD 3 FOR:

- Five Times the Water Resistance of PVC Cable
- Direct Burial in Wet Earth Without Conduit
- Unsurpassed Service Life in Outdoor Use
- Unmatched Ultraviolet Light Stability

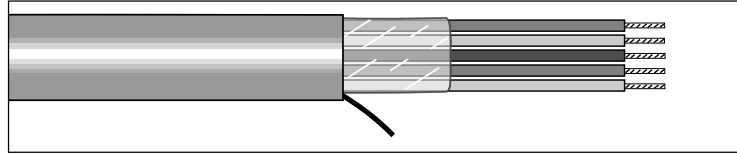

XTRA•GUARD 3 APPLICATIONS:

- Inter-building Communications
- Satellite Communications Equipment
- Land Irrigation Systems
- Outdoor Security Systems
- Outdoor Scoreboards and Displays
- Pipeline Sensor Controls

CHARACTERISTICS

OPERATING TEMPERATURE:

- -20°C to 80°C

VOLTAGE RATING:

- 300 Volt

COLOR DESCRIPTION:

- Color Code: 22 AWG Chart E [Doc#7397](#) Page 375,
20, 18, 16 AWG Chart D [Doc#7397](#) Page 375
- Jacket Color: Black

PRODUCT DESCRIPTION:

- Conductor: Stranded Tinned Copper
- Insulation: Color-Coded Premium PVC
- Nylon Rip Cord for Ease of Jacket Stripping
- Jacket: Ethylene-Propylene Copolymer



AVAILABILITY

- ▲ In Stock: Black, 500 ft (152m) and 1000 ft (305m) put-ups
- Made-To-Order Only, 1,000 ft (305m) minimum

22 AWG (0,35mm²), **7/30** (7x0,25mm), Insulation Thickness: **0.010"** (0,25mm)

XTRA•GUARD 3 Part No.	No. of Cond.	Jacket Thickness		Nominal Diameter	
		Inches	mm	Inches	mm
35002	2	0.032	0,81	0.17	4,3
▲ 35003	3	0.032	0,81	0.19	4,8
35004	4	0.032	0,81	0.20	5,2
35006	6	0.032	0,81	0.23	5,8
35008	8	0.032	0,81	0.25	6,4
35010	10	0.032	0,81	0.27	6,9
35010/15	15	0.032	0,81	0.31	7,9

20 AWG (0,56mm²), **7/28** (7x0,32mm), Insulation Thickness: **0.017"** (0,43mm)

XTRA•GUARD 3 Part No.	No. of Cond.	Jacket Thickness		Nominal Diameter	
		Inches	mm	Inches	mm
35052	2	0.032	0,81	0.21	5,3
35053	3	0.032	0,81	0.23	5,9
35054	4	0.032	0,81	0.25	6,5
35056	6	0.032	0,81	0.29	7,4
▲ 35058	8	0.032	0,81	0.32	8,2
35060	10	0.032	0,81	0.35	8,8
35060/15	15	0.032	0,81	0.40	10,3

18 AWG (0,81mm²), **16/30** (16x0,25mm), Insulation Thickness: **0.017"** (0,43mm)

XTRA•GUARD 3 Part No.	No. of Cond.	Jacket Thickness		Nominal Diameter	
		Inches	mm	Inches	mm
35062	2	0.032	0,81	0.23	5,8
35063	3	0.032	0,81	0.24	6,1
35064	4	0.032	0,81	0.26	6,6
35066	6	0.032	0,81	0.31	7,9
35068	8	0.032	0,81	0.33	8,4
35070	10	0.032	0,81	0.39	9,8
35070/15	15	0.032	0,81	0.45	11,5

16 AWG (1,23mm²), **19/0.0117** (19x0,29mm), Insulation Thickness: **0.017"** (0,43mm)

XTRA•GUARD 3 Part No.	No. of Cond.	Jacket Thickness		Nominal Diameter	
		Inches	mm	Inches	mm
35072	2	0.032	0,81	0.26	6,5
35073	3	0.032	0,81	0.29	7,4
35074	4	0.032	0,81	0.32	8,1
35076	6	0.032	0,81	0.37	9,3
35078	8	0.032	0,81	0.41	10,4
35080	10	0.032	0,81	0.44	11,3
35080/15	15	0.032	0,81	0.52	13,2

FIT® TUBING RECOMMENDATION

FIT®-700 – Bonding, Mastic Lined, Irradiated Polyolefin (See [Doc#7371](#) Page 126 for Product Specifications)


FOR COMPLETE PRODUCT PERFORMANCE DATA, SEE TECHNICAL SECTION [Doc#7394](#).

**DIRECT BURIAL
300 VOLT**

**MULTICONDUCTOR, FOIL SHIELD
EXTRA-DURABLE OUTDOOR DIRECT-BURIAL JACKET**

CHOOSE XTRA•GUARD 3 FOR:

- Five Times the Water Resistance of PVC Cable
- Direct Burial in Wet Earth Without Conduit
- Unsurpassed Service Life in Outdoor Use
- Unmatched Ultraviolet Light Stability

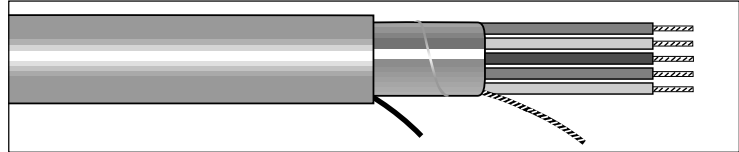

XTRA•GUARD 3 APPLICATIONS:

- Inter-building Communications
- Satellite Communications Equipment
- Land Irrigation Systems
- Outdoor Security Systems
- Outdoor Scoreboards and Displays
- Pipeline Sensor Controls

CHARACTERISTICS

OPERATING TEMPERATURE:

- -20°C to 80°C

VOLTAGE RATING:

- 300 Volt

COLOR DESCRIPTION:

- Color Code: 22 AWG Chart E [Doc#7397](#) Page 375,
20 AWG Chart D [Doc#7397](#) Page 375
- Jacket Color: Black

PRODUCT DESCRIPTION:

- Conductor: Stranded Tinned Copper
- Insulation: Color-Coded Premium PVC
- Shield: Aluminum/Polyester Foil Facing In with
Stranded Tinned Copper Drain Wire Equal in Size to
Insulated Conductors of Cable
- Nylon Rip Cord for Ease of Jacket Stripping
- Jacket: Ethylene-Propylene Copolymer



AVAILABILITY

- ▲ In Stock: Black, 500 ft (152m) and 1000 ft (305m) put-ups
- Made-To-Order Only, 1,000 ft (305m) minimum

22 AWG (0,35mm²), 7/30 (7x0,25mm), Insulation Thickness: 0.010" (0,25mm)

XTRA•GUARD 3 Part No.	No. of Cond.	Jacket Thickness		Nominal Diameter	
		Inches	mm	Inches	mm
35192	2	0.032	0,81	0.18	4,6
▲ 35193	3	0.032	0,81	0.19	4,9
35194	4	0.032	0,81	0.20	5,1
▲ 35196	6	0.032	0,81	0.23	5,9
35198	8	0.032	0,81	0.25	6,4
35199/10	10	0.032	0,81	0.28	7,0
35199/15	15	0.032	0,81	0.31	7,9
35199/20	20	0.032	0,81	0.34	8,6
35199/25	25	0.032	0,81	0.38	9,7
35199/30	30	0.032	0,81	0.40	10,2
35199/40	40	0.032	0,81	0.45	11,5
35199/50	50	0.032	0,81	0.49	12,5
35199/60	60	0.032	0,81	0.53	13,5

20 AWG (0,56mm²), 7/28 (7x0,32mm), Insulation Thickness: 0.017" (0,43mm)

XTRA•GUARD 3 Part No.	No. of Cond.	Jacket Thickness		Nominal Diameter	
		Inches	mm	Inches	mm
35462	2	0.032	0,81	0.21	5,4
35463	3	0.032	0,81	0.22	5,6
35464	4	0.032	0,81	0.24	6,1
35466	6	0.032	0,81	0.28	7,1
35468	8	0.032	0,81	0.31	7,9
35470	10	0.032	0,81	0.35	8,9
35470/15	15	0.032	0,81	0.41	10,4
35470/20	20	0.032	0,81	0.46	11,6
35470/25	25	0.032	0,81	0.50	12,7

Additional AWG sizes on next page.

FIT® TUBING RECOMMENDATION

FIT®-700 – Bonding, Mastic Lined, Irradiated Polyolefin (See [Doc#7371](#) Page 126 for Product Specifications)


FOR COMPLETE PRODUCT PERFORMANCE DATA, SEE TECHNICAL SECTION [Doc#7394](#).

MULTICONDUCTOR, FOIL SHIELD
EXTRA-DURABLE OUTDOOR DIRECT-BURIAL JACKET

DIRECT BURIAL
300 VOLT

CHOOSE XTRA•GUARD 3 FOR:

- Five Times the Water Resistance of PVC Cable
- Direct Burial in Wet Earth Without Conduit
- Unsurpassed Service Life in Outdoor Use
- Unmatched Ultraviolet Light Stability

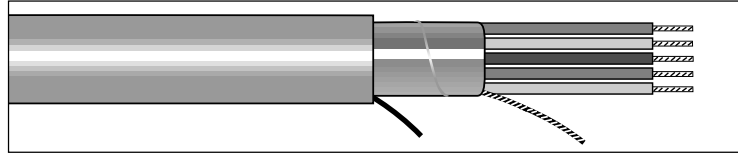

XTRA•GUARD 3 APPLICATIONS:

- Inter-building Communications
- Satellite Communications Equipment
- Land Irrigation Systems
- Outdoor Security Systems
- Outdoor Scoreboards and Displays
- Pipeline Sensor Controls

CHARACTERISTICS

OPERATING TEMPERATURE:

- -20°C to 80°C

VOLTAGE RATING:

- 300 Volt

COLOR DESCRIPTION:

- Color Code: Chart D [Doc#7397](#) Page 375
- Jacket Color: Black

PRODUCT DESCRIPTION:

- Conductor: Stranded Tinned Copper
- Insulation: Color-Coded Premium PVC
- Shield: Aluminum/Polyester Foil Facing In with Stranded Tinned Copper Drain Wire Equal in Size to Insulated Conductors of Cable
- Nylon Rip Cord for Ease of Jacket Stripping
- Jacket: Ethylene-Propylene Copolymer



Suitable for
Direct Burial

AVAILABILITY

- Made-To-Order Only, 1,000 ft (305m) minimum

18 AWG (0,81mm²), **16/30** (16x0,25mm), Insulation Thickness: **0.017"** (0,43mm)

XTRA•GUARD 3 Part No.	No. of Cond.	Jacket Thickness		Nominal Diameter	
		Inches	mm	Inches	mm
35382	2	0.032	0,81	0.23	5,9
35383	3	0.032	0,81	0.24	6,1
35384	4	0.032	0,81	0.26	6,6
35386	6	0.032	0,81	0.31	7,9
35388	8	0.032	0,81	0.33	8,3
35390	10	0.032	0,81	0.39	9,9
35390/15	15	0.032	0,81	0.45	11,5
35390/20	20	0.032	0,81	0.51	13,0
35390/25	25	0.053	1,35	0.56	14,2

16 AWG (1,23mm²), **19/0.0117** (19x0,29mm), Insulation Thickness: **0.017"** (0,43mm)

XTRA•GUARD 3 Part No.	No. of Cond.	Jacket Thickness		Nominal Diameter	
		Inches	mm	Inches	mm
35362	2	0.032	0,81	0.25	6,4
35363	3	0.032	0,81	0.27	6,9
35364	4	0.032	0,81	0.29	7,4
35366	6	0.032	0,81	0.35	8,9
35368	8	0.032	0,81	0.38	9,7
35370	10	0.032	0,81	0.44	11,2
35370/15	15	0.032	0,81	0.49	12,5
35370/20	20	0.053	1,35	0.59	14,9
35370/25	25	0.053	1,35	0.66	16,8

FIT® TUBING RECOMMENDATION

FIT®-700 – Bonding, Mastic Lined, Irradiated Polyolefin (See [Doc#7371](#) Page 126 for Product Specifications)


FOR COMPLETE PRODUCT PERFORMANCE DATA, SEE TECHNICAL SECTION [Doc#7394](#).

DIRECT BURIAL 600 VOLT

MULTICONDUCTOR, FOIL SHIELD EXTRA-DURABLE OUTDOOR DIRECT-BURIAL JACKET

CHOOSE XTRA•GUARD 3 FOR:

- Five Times the Water Resistance of PVC Cable
- Direct Burial in Wet Earth Without Conduit
- Unsurpassed Service Life in Outdoor Use
- Unmatched Ultraviolet Light Stability

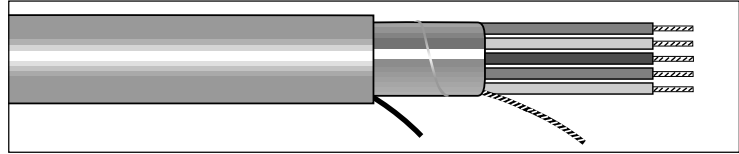

XTRA•GUARD 3 APPLICATIONS:

- Inter-building Communications
- Satellite Communications Equipment
- Land Irrigation Systems
- Outdoor Security Systems
- Outdoor Scoreboards and Displays
- Pipeline Sensor Controls

CHARACTERISTICS

OPERATING TEMPERATURE:

- -20°C to 80°C

VOLTAGE RATING:

- 600 Volt

COLOR DESCRIPTION:

- Color Code: Chart D [Doc#7397](#) Page 375
- Jacket Color: Black

PRODUCT DESCRIPTION:

- Conductor: Stranded Tinned Copper
- Insulation: Color-Coded Premium PVC
- Shield: Aluminum/Polyester Foil Facing In with Stranded Tinned Copper Drain Wire Equal in Size to Insulated Conductors of Cable
- Nylon Rip Cord for Ease of Jacket Stripping
- Jacket: Ethylene-Propylene Copolymer



Suitable for
Direct Burial

AVAILABILITY

- Made-To-Order Only, 1,000 ft (305m) minimum

18 AWG (0,81mm²), 16/30 (16x0,25mm), Insulation Thickness: 0.032" (0,81mm)

XTRA•GUARD 3 Part No.	No. of Cond.	Jacket Thickness		Nominal Diameter	
		Inches	mm	Inches	mm
35430/2	2	0.063	1,60	0.35	9,0
35430/3	3	0.063	1,60	0.37	9,5
35430/5	5	0.063	1,60	0.46	11,6
35430/7	7	0.063	1,60	0.51	12,9
35430/9	9	0.063	1,60	0.55	14,0
35430/12	12	0.063	1,60	0.61	15,5

16 AWG (1,23mm²), 19/0.0117 (19x0,29mm), Insulation Thickness: 0.032" (0,81mm)

XTRA•GUARD 3 Part No.	No. of Cond.	Jacket Thickness		Nominal Diameter	
		Inches	mm	Inches	mm
35440/2	2	0.063	1,60	0.38	9,7
35440/3	3	0.063	1,60	0.40	10,2
35440/5	5	0.063	1,60	0.50	12,7
35440/7	7	0.063	1,60	0.56	14,1
35440/9	9	0.063	1,60	0.61	15,4
35440/12	12	0.063	1,60	0.67	17,1

14 AWG (2,08mm²), 41/30 (41x0,25mm), Insulation Thickness: 0.032" (0,81mm)

XTRA•GUARD 3 Part No.	No. of Cond.	Jacket Thickness		Nominal Diameter	
		Inches	mm	Inches	mm
35450/2	2	0.063	1,60	0.41	10,4
35450/3	3	0.063	1,60	0.43	11,0
35450/5	5	0.063	1,60	0.52	13,3
35450/7	7	0.063	1,60	0.59	14,9
35450/9	9	0.063	1,60	0.64	16,3
35450/12	12	0.063	1,60	0.71	18,1

FIT® TUBING RECOMMENDATION

FIT®-700 – Bonding, Mastic Lined, Irradiated Polyolefin (See [Doc#7371](#) Page 126 for Product Specifications)


FOR COMPLETE PRODUCT PERFORMANCE DATA, SEE TECHNICAL SECTION [Doc#7394](#).

MULTICONDUCTOR, SUPRASHIELD® EXTRA-DURABLE OUTDOOR DIRECT-BURIAL JACKET

**DIRECT BURIAL
300 VOLT**

CHOOSE XTRA•GUARD 3 FOR:

- Five Times the Water Resistance of PVC Cable
- Direct Burial in Wet Earth Without Conduit
- Unsurpassed Service Life in Outdoor Use
- Unmatched Ultraviolet Light Stability
- **SUPRASHIELD** – Twice as Effective as Foil Shielding

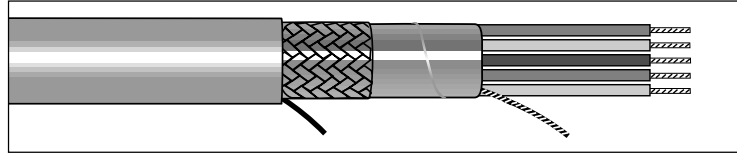

XTRA•GUARD 3 APPLICATIONS:

- Inter-building Communications
- Satellite Communications Equipment
- Land Irrigation Systems
- Outdoor Security Systems
- Outdoor Scoreboards and Displays
- Pipeline Sensor Controls

CHARACTERISTICS

OPERATING TEMPERATURE:

- -20°C to 80°C

VOLTAGE RATING:

- 300 Volt

COLOR DESCRIPTION:

- Color Code: 22 AWG Chart E [Doc#7397](#) Page 375,
20, 18, 16 AWG Chart D [Doc#7397](#) Page 375
- Jacket Color: Black

PRODUCT DESCRIPTION:

- Conductor: Stranded Tinned Copper
- Insulation: Color-Coded Premium PVC
- **SUPRASHIELD**: Aluminum/Polyester/Aluminum Foil with Stranded Tinned Copper Drain Wire Equal in Size to Insulated Conductors of Cable plus 70% Overall Braid of Tinned Copper
- Nylon Rip Cord for Ease of Jacket Stripping
- Jacket: Ethylene-Propylene Copolymer



Suitable for
Direct Burial

AVAILABILITY

- Made-To-Order Only, 1,000 ft (305m) minimum

22 AWG (0,35mm²), **7/30** (7x0,25mm), Insulation Thickness: **0.010"** (0,25mm)

XTRA•GUARD 3 Part No.	No. of Cond.	Jacket Thickness		Nominal Diameter	
		Inches	mm	Inches	mm
35102	2	0.032	0,81	0.20	5,0
35103	3	0.032	0,81	0.21	5,4
35104	4	0.032	0,81	0.22	5,6
35106	6	0.032	0,81	0.25	6,4
35108	8	0.032	0,81	0.27	6,9
35110	10	0.032	0,81	0.30	7,6
35110/15	15	0.032	0,81	0.33	8,4

20 AWG (0,56mm²), **7/28** (7x0,32mm), Insulation Thickness: **0.017"** (0,43mm)

XTRA•GUARD 3 Part No.	No. of Cond.	Jacket Thickness		Nominal Diameter	
		Inches	mm	Inches	mm
35152	2	0.032	0,81	0.23	5,9
35153	3	0.032	0,81	0.26	6,6
35154	4	0.032	0,81	0.28	7,1
35156	6	0.032	0,81	0.32	8,0
35158	8	0.032	0,81	0.35	8,8
35160	10	0.032	0,81	0.37	9,5
35160/15	15	0.032	0,81	0.43	10,9

18 AWG (0,81mm²), **16/30** (16x0,25mm), Insulation Thickness: **0.017"** (0,43mm)

XTRA•GUARD 3 Part No.	No. of Cond.	Jacket Thickness		Nominal Diameter	
		Inches	mm	Inches	mm
35162, 35162/1*	2	0.032	0,81	0.25	6,5
35163, 35163/1*	3	0.032	0,81	0.28	7,2
35164	4	0.032	0,81	0.31	7,8
35166	6	0.032	0,81	0.35	8,9
35168	8	0.032	0,81	0.38	9,7
35170	10	0.032	0,81	0.41	10,5
35170/15	15	0.032	0,81	0.48	12,1

16 AWG (1,23mm²), **19/0.0117** (19x0,29mm), Insulation Thickness: **0.017"** (0,43mm)

XTRA•GUARD 3 Part No.	No. of Cond.	Jacket Thickness		Nominal Diameter	
		Inches	mm	Inches	mm
35172, 35172/1*	2	0.032	0,81	0.28	7,2
35173, 35173/1*	3	0.032	0,81	0.32	8,0
35174	4	0.032	0,81	0.34	8,8
35176	6	0.032	0,81	0.39	10,0
35178	8	0.032	0,81	0.43	11,0
35180	10	0.032	0,81	0.47	11,9
35180/15	15	0.032	0,81	0.55	13,9

*Conductors color coded per international standards: brown, blue, green/yellow.

FIT® TUBING RECOMMENDATION

FIT®-700 – Bonding, Mastic Lined, Irradiated Polyolefin (See [Doc#7371](#) Page 126 for Product Specifications)


FOR COMPLETE PRODUCT PERFORMANCE DATA, SEE TECHNICAL SECTION [Doc#7394](#).

DIRECT BURIAL 300 VOLT

MULTIPAIR, FOIL SHIELD EXTRA-DURABLE OUTDOOR DIRECT-BURIAL JACKET

CHOOSE XTRA•GUARD 3 FOR:

- Five Times the Water Resistance of PVC Cable
- Direct Burial in Wet Earth Without Conduit
- Unsurpassed Service Life in Outdoor Use
- Unmatched Ultraviolet Light Stability

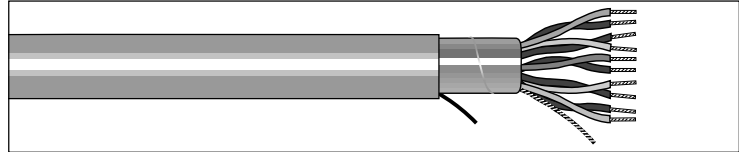

XTRA•GUARD 3 APPLICATIONS:

- Inter-building Communications
- Satellite Communications Equipment
- Land Irrigation Systems
- Outdoor Security Systems
- Outdoor Scoreboards and Displays
- Pipeline Sensor Controls

CHARACTERISTICS

OPERATING TEMPERATURE:

- -20°C to 80°C

VOLTAGE RATING:

- 300 Volt

COLOR DESCRIPTION:

- Color Code: 24, 22 AWG Chart B [Doc#7397](#) Page 374, 20, 18 AWG Chart A [Doc#7397](#) Page 374
- Jacket Color: Black

PRODUCT DESCRIPTION:

- Conductor: Stranded Tinned Copper
- Insulation: Color-Coded Premium PVC
- Shield: Aluminum/Polyester Foil Facing In with Stranded Tinned Copper Drain Wire Equal in Size to Insulated Conductors of Cable
- Nylon Rip Cord for Ease of Jacket Stripping
- Jacket: Ethylene-Propylene Copolymer



AVAILABILITY

- Made-To-Order Only, 1,000 ft (305m) minimum

24 AWG (0,23mm²), 7/32 (7x0,20mm), Insulation Thickness: 0.010" (0,25mm)

XTRA•GUARD 3 Part No.	No. of Pairs	Jacket Thickness		Nominal Diameter	
		Inches	mm	Inches	mm
35491	1	0.032	0,81	0.16	4,1
35492	2	0.032	0,81	0.21	5,2
35493	3	0.032	0,81	0.23	5,9
35494	4	0.032	0,81	0.25	6,5

22 AWG (0,35mm²), 7/30 (7x0,25mm), Insulation Thickness: 0.010" (0,25mm)

XTRA•GUARD 3 Part No.	No. of Pairs	Jacket Thickness		Nominal Diameter	
		Inches	mm	Inches	mm
35481	1	0.032	0,81	0.18	4,6
35482	2	0.032	0,81	0.23	5,8
35483	3	0.032	0,81	0.25	6,5
35484	4	0.032	0,81	0.27	7,0
35485	5	0.032	0,81	0.29	7,4

20 AWG (0,56mm²), 7/28 (7x0,32mm), Insulation Thickness: 0.017" (0,43mm)

XTRA•GUARD 3 Part No.	No. of Pairs	Jacket Thickness		Nominal Diameter	
		Inches	mm	Inches	mm
35452	2	0.032	0,81	0.30	7,7
35453	3	0.032	0,81	0.33	8,3

18 AWG (0,81mm²), 16/30 (16x0,25mm), Insulation Thickness: 0.017" (0,43mm)

XTRA•GUARD 3 Part No.	No. of Pairs	Jacket Thickness		Nominal Diameter	
		Inches	mm	Inches	mm
35372	2	0.032	0,81	0.34	8,5
35373	3	0.032	0,81	0.36	9,2
35376	6	0.032	0,81	0.47	12,0

FIT® TUBING RECOMMENDATION

FIT®-700 – Bonding, Mastic Lined, Irradiated Polyolefin (See [Doc#7371](#) Page 126 for Product Specifications)


FOR COMPLETE PRODUCT PERFORMANCE DATA, SEE TECHNICAL SECTION [Doc#7394](#).

MULTIPAIR, SUPRASHIELD®
EXTRA-DURABLE OUTDOOR DIRECT-BURIAL JACKET

DIRECT BURIAL
300 VOLT

CHOOSE XTRA•GUARD 3 FOR:

- Five Times the Water Resistance of PVC Cable
- Direct Burial in Wet Earth Without Conduit
- Unsurpassed Service Life in Outdoor Use
- Unmatched Ultraviolet Light Stability
- **SUPRASHIELD** – Twice as Effective as Foil Shielding

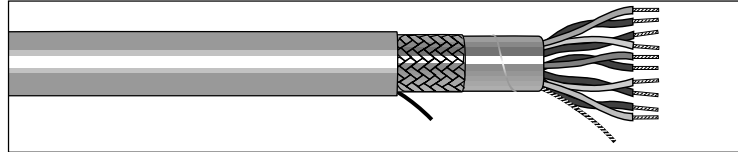

XTRA•GUARD 3 APPLICATIONS:

- Inter-building Communications
- Satellite Communications Equipment
- Land Irrigation Systems
- Outdoor Security Systems
- Outdoor Scoreboards and Displays
- Pipeline Sensor Controls

CHARACTERISTICS

OPERATING TEMPERATURE:

- -20°C to 80°C

VOLTAGE RATING:

- 300 Volt

COLOR DESCRIPTION:

- Color Code: Chart B [Doc#7397](#) Page 374
- Jacket Color: Black

PRODUCT DESCRIPTION:

- Conductor: Stranded Tinned Copper
- Insulation: Color-Coded Premium PVC
- **SUPRASHIELD**: Aluminum/Polyester/Aluminum Foil with Stranded Tinned Copper Drain Wire Equal in Size to Insulated Conductors of Cable plus 70% Overall Braid of Tinned Copper
- Nylon Rip Cord for Ease of Jacket Stripping
- Jacket: Ethylene-Propylene Copolymer



AVAILABILITY

- Made-To-Order Only, 1,000 ft (305m) minimum

24 AWG (0,23mm²), 7/32 (7x0,20mm), Insulation Thickness: 0.010" (0,25mm)

XTRA•GUARD 3 Part No.	No. of Pairs	Jacket Thickness		Nominal Diameter	
		Inches	mm	Inches	mm
35272	2	0.032	0,81	0.23	5,8

22 AWG (0,35mm²), 7/30 (7x0,25mm), Insulation Thickness: 0.010" (0,25mm)

XTRA•GUARD 3 Part No.	No. of Pairs	Jacket Thickness		Nominal Diameter	
		Inches	mm	Inches	mm
35121	1	0.032	0,81	0.20	5,1
35122	2	0.032	0,81	0.25	6,3
35123	3	0.032	0,81	0.28	7,1
35124	4	0.032	0,81	0.31	7,8
35125	5	0.032	0,81	0.33	8,3
35126	6	0.032	0,81	0.35	8,9
35129	9	0.032	0,81	0.40	10,1

FIT® TUBING RECOMMENDATION

FIT®-700 – Bonding, Mastic Lined, Irradiated Polyolefin (See [Doc#7371](#) Page 126 for Product Specifications)

FOR COMPLETE PRODUCT PERFORMANCE DATA, SEE TECHNICAL SECTION [Doc#7394](#).