



10 AMP and 15 AMP Parallel Plugs and Connectors




10 AMP 125V w/18-2 SPT-1 Cord
3 AMP 125V w/20-2XT Cord

DESCRIPTION	CAT. NO.	COLOR	CORD DIA. (inches/mm)	WIRE GAUGE (stranded)	NEMA CONFIG.
Easy Wire Plug	123* 123-I*	Brown Ivory			1-15P Non-Polarized 
Same as No. 123, Polarized	123-P* 123-PE* 123-PI* 123-PW*	Brown Black Ivory White		No. 18-2SPT-1 or No. 20-2 XT Only	1-15P Polarized 

*Packed 500 Bulk



15 AMP 125V 2-Pole, 2-Wire

DESCRIPTION	CAT. NO.	COLOR	CORD DIA. (inches/mm)	WIRE GAUGE (stranded)	NEMA CONFIG.
Non-Polarized Light Duty Clampbite Plug	101 101-W 101-E	Brown White Black		No. 20, 18, 16 Flat or Round	
Note: Consult B-I-A for availability of polarized version.					
Polarized Light Duty Clampbite Connector	102 102-W 102-E	Brown White Black	Up to .250" 6.4mm	No. 18-2	
Non-Polarized Heavy-Duty PVC Plug	115PV	Yellow			
Non-Polarized Heavy-Duty TPE Rubber Plug	115PR	Black	.245-.655" 6.2-16.6mm	AWG 18-2 to 12-3 cable.	1-15P Non-Polarized 
Non-Polarized Short Flat Vinyl Plug★	48643 48643-W 48643-E	Brown White Black	.375 max. 9.5mm max.	18-14	1-15P Polarized 
Non-Polarized Angle Vinyl Plug★	638 638-B 638-W	Black Brown White	.343 max. 8.7mm max.	16 max.	1-15R Polarized 
Non-Polarized Round Vinyl Handle Plug, w/Cord Clamp★	48646	Black	.437 max. 11.1mm max.	18-14	
Non-Polarized Vinyl Connector, w/Cord Clamp★	612†	Black	.437 max. 11.1mm max.	14 max.	
Non-Polarized Round Vinyl Handle Plug, w/Spring Blades★	48642	Black	.375 max. 9.5mm max.	18-14	



SPECIFICATIONS & FEATURES

- Brass plug blades and connector contacts for maximum conductivity
- Armored devices have heavily plated steel shields and cord clamps
- Vinyl devices resist chipping, cracking, oils, grease and acids
- Rubber devices resist cold, abrasion, grease, oils, acids and impact
- Plastic devices resist grease, oils and acids


TESTING & CODE COMPLIANCE


- Meet NEMA requirements (1-15P)
- UL Listed (File #E-13393)
- CSA Certified
- NOM Certified (#057)
- Backed by a Limited Two-Year Warranty

MATERIAL CHARACTERISTICS

Environmental: Flammability, Rated V2 per UL 94
Operating Temperature: -40°C to 65°C

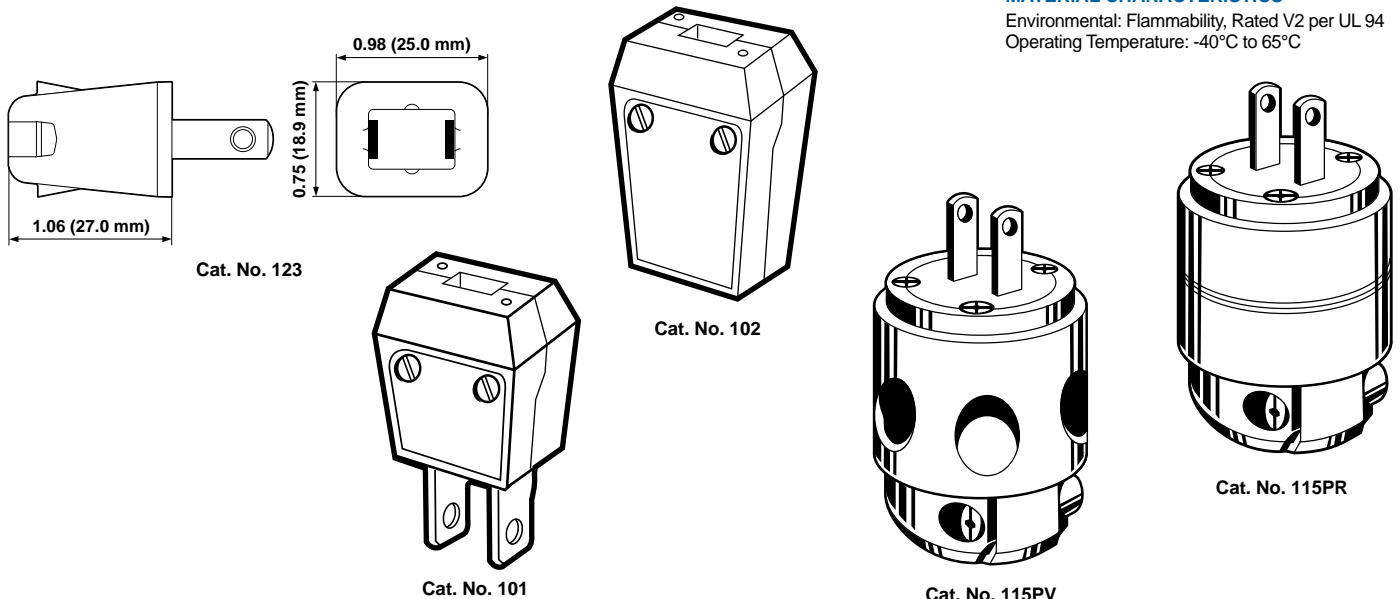

*Packed 500 bulk. †Not UL Listed. For replacement use only.
All devices are UL Listed. Also CSA Certified except where indicated by★

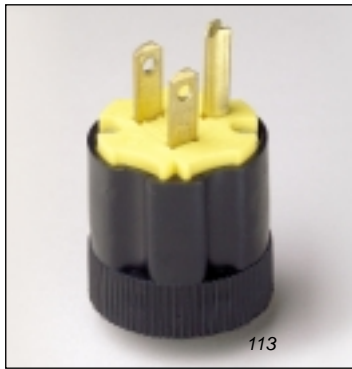



15 AMP 125V 2-Pole, 3-Wire Grounding Plugs and Connectors

15 AMP 125V 2-Pole, 3-Wire Grounding

DESCRIPTION	CAT. NO.	COLOR	CORD DIA. (inches)	WIRE GAUGE (stranded)	NEMA CONFIG.
Vinyl Handle Plug, w/Cord Clamp★	48648	Black	.437 max. 11.1mm max.	18-14	
Vinyl Connector, w/ Steel Cord Clamp	617	Black	.437 max. 11.1mm max.	16 max.	
Rubber Plug w/Vinyl Inner Assembly	113	Black	.396-.562 10.1-14.3mm	18-14	5-15P 
Rubber Connector mates w/No. 113 above	114	Black	.396-.562 10.1-14.3mm	18-14	5-15R 
Weatherproof Inlet on Flush Mount Wallplate with Aluminum Cover	4937			No. 10 max. copper or copper clad	

All devices are UL Listed. Also CSA Certified except where indicated by★

SPECIFICATIONS & FEATURES


- Double wipe brass contacts for maximum conductivity and blade retention

TESTING & CODE COMPLIANCE


- Meet NEMA requirements
- UL Listed (File #E-13393)
- CSA Certified (File #LR-406)
- NOM Certified (#057)
- Backed by a Limited Two-Year Warranty

MATERIAL CHARACTERISTICS

Environmental: Flammability, Rated V2 per UL 94
Operating Temperature: -40°C to 65°C

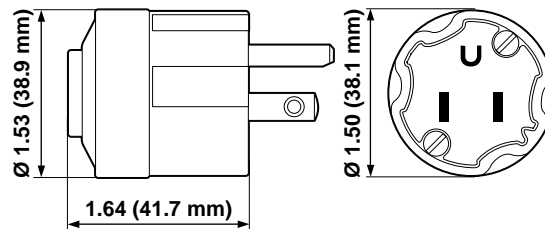

Cat. No. 113

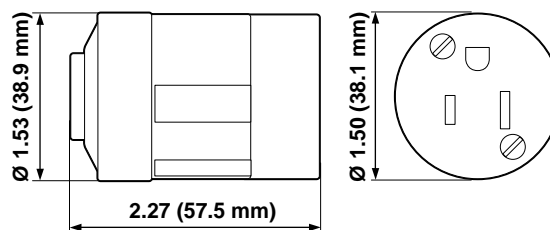

Cat. No. 114