



### 15 AMP Non-NEMA Locking Devices

15 AMP 125V/10A-250 3-Pole 3-Wire Non-Grounding Non-NEMA†

DESCRIPTION	CAT. NO.	CORD DIA. (inches)	WIRE GAUGE (stranded)	NON-NEMA CONFIG.
Single Flush Receptacle★	7582**			
Locking Plug★	7567-C*	.245-.700	10-18	NON-NEMA 
Locking Connector†★	7565-C*	.245-.700	10-18	
Locking Flanged Inlet★	7556			NON-NEMA 
Locking Flanged Outlet★	7557			

†These devices are no longer UL Listed and are for replacement use only. Add (-G) for grounding version.



\*Grounding (-G) version not available. For grounding connector, use Cat. No. 7555-G

\*\*Uses stainless steel wallplate, Cat. No. 84004-40.





### 20 AMP Non-NEMA Locking Devices

20 AMP 250V AC/DC / 10 AMP 600V AC 4-Pole 5-Wire Grounding Non-NEMA



DESCRIPTION	CAT. NO.	CORD DIA. (inches)	WIRE GAUGE (stranded)	NON-NEMA CONFIG.
Single Flush Receptacle★	3520Δ			
Locking Plug, Black Nylon Body★	3521-C	.595-.895	10-18	NON-NEMA 
Locking Connector, Black Nylon Body★	3523-C	.595-.895	10-18	
Locking Flanged Inlet★	3524-C			NON-NEMA 
Locking Flanged Outlet★	3525-C			



20 AMP, 125V/250V 3-Pole 3-Wire Non-Grounding Non-NEMA††

DESCRIPTION	CAT. NO.	CORD DIA. (inches)	WIRE GAUGE (stranded)	NON-NEMA CONFIG.
Single Flush Receptacle★	7310-BΔ			
Locking Plug★	9965-C	.385-.780	10-18	NON-NEMA 
Locking Connector★	7314-C	.385-.780	10-18	
Locking Flanged Inlet★	3325-C			NON-NEMA 
Locking Flanged Outlet★	3326-C			

20 AMP 3ØY 120V/208V 4-Pole 4-Wire Non-Grounding Non-NEMA††

DESCRIPTION	CAT. NO.	CORD DIA. (inches)	WIRE GAUGE (stranded)	NON-NEMA CONFIG.
Single Flush Receptacle★	7410-BΔ			
Locking Plug★	7411-C	.595-.895	10-18	NON-NEMA 
Locking Connector★	7413-C	.595-.895	10-18	
Locking Flanged Inlet★	7408-C			NON-NEMA 
Locking Flanged Outlet★	7409-C			

††Effective July 1, 1981, rating for non-grounding versions was changed from 20A-250V AC/DC, 10A-600V AC to comply with UL requirements. Add (-G) for grounding devices: (-G) devices are rated 20A-250V AC/DC, 10A-600V AC and are no longer UL Listed — for replacement use only.

For Corrosion Resistant Locking Devices, please check B-I-A Document # 7546.

ΔUses stainless steel wallplate, Cat. No. 84020-40. For additional wallplate selections, please call our sales office.

Weather-Resistant Boots for 15A & 20A Locking Plugs and Connectors are listed in B-I-A Document # 7543.

All devices are UL Listed. Also CSA certified except where indicated by★

#### SPECIFICATIONS & FEATURES


- Locking Receptacles feature a complete range of ratings and Non-NEMA configurations, non-grounding
- Locking Plugs and Connectors feature heavy-duty construction for top performance in the environmental extremes of grueling industrial settings
- Flanged Inlets and Outlets are built to endure hard use with rugged nylon flanges that assure a smooth, flush fit and outstanding resistance to cracking and breaking

#### TESTING & CODE COMPLIANCE

- All receptacles, plugs, connectors, inlets and outlets are designed to meet NEMA WD-6, and ANSI C-73, and to meet/exceed UL 498 standards
- UL Fed Spec. Listed WC-596 (File #E-13399 — Cat. Nos. 7582, 7557, 3520, 2525-C, 7310-B, 3326-C, 7410-B, 7409-C; File #E-13393 — Cat. Nos. 7567-C, 7565-C, 7556, 3521-C, 3523-C, 3524-C, 9965-C, 7314-C, 3325-C, 7411-C, 7413-C, 7408-C)
- CSA Certified (File #LR-406)
- NOM Certified (#057)
- Backed by a Limited 10-Year Warranty

#### MATERIAL CHARACTERISTICS

Environmental: Flammability per UL94 or CSA C22/06 Requirements  
Operating Temperature: -40°C to 75°C

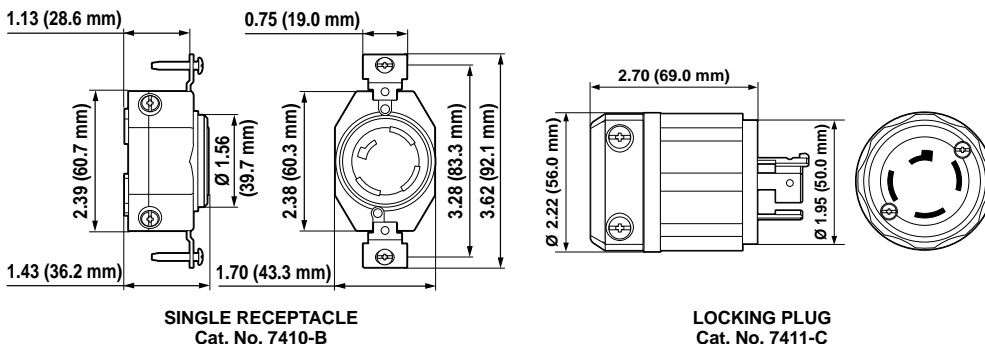



3331-C



3333-C

### SPECIFICATIONS & FEATURES


- Locking Receptacles feature a complete range of ratings and Non-NEMA configurations, including isolated ground and non-grounding
- Locking Plugs and Connectors feature heavy-duty construction for top performance in the environmental extremes of grueling industrial settings
- Flanged Inlets and Outlets are built to endure hard use with rugged nylon flanges that assure a smooth, flush fit and outstanding resistance to cracking and breaking

### TESTING & CODE COMPLIANCE

- All receptacles, plugs, connectors, inlets and outlets are designed to meet NEMA WD-6, and ANSI C-73, and to meet/exceed UL 498 standards
- UL Fed Spec. Listed WC-596 (File #E-13399 — Cat. Nos. 3330, 3335-C, 3530, 3535-C, 3771, 7379, 3769; File #E-13393 — Cat. Nos. 3331-C, 3333-C, 3334-C, 3431-C, 3433-C, 3434-C, 3763-C, 3762-C, 3777, 7765-C, 7764-C, 3765-C, 3764-C, 3775)
- CSA Certified (LR-406)
- NOM Certified (#057)
- Backed by a Limited 10-Year Warranty

### MATERIAL CHARACTERISTICS

Environmental: Flammability per UL94 or CSA C22/06 Requirements  
 Operating Temperature: -40°C to 75°C

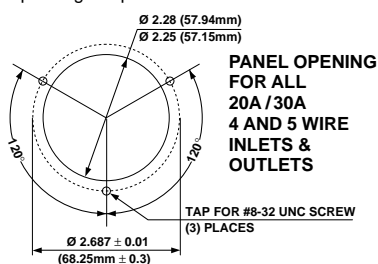

## 30 AMP Non-NEMA Locking Devices

30 AMP 125V/250 3-Pole 3-Wire Non-Grounding Non-NEMA<sup>†</sup>

DESCRIPTION	CAT. NO.	CORD DIA. (inches)	WIRE GAUGE (stranded)	NON-NEMA CONFIG.
Single Flush Receptacle★	3330**			
Locking Plug★	3331-C	.385-.860	10-18	<p>NON-NEMA</p>
Locking Connector★	3333-C	.385-.860	10-18	
Locking Flanged Inlet★	3334-C			
Locking Flanged Outlet★	3335-C			

<sup>†</sup>Effective July 1, 1981, rating for non-grounding versions was changed from 30A-250V to comply with UL requirements. Add (-G) for grounding devices: (-G) devices are rated 30A-250V and are no longer UL Listed — for replacement use only.

30 AMP 3ØY 120V/208V 4-Pole 4-Wire Non-Grounding Non-NEMA<sup>††</sup>

DESCRIPTION	CAT. NO.	CORD DIA. (inches)	WIRE GAUGE (stranded)	NON-NEMA CONFIG.
Single Flush Receptacle★	3430**			
Locking Plug★	3431-C	.595-.1.150	10-18	<p>NON-NEMA</p>
Locking Connector★	3433-C	.595-.1.150	10-18	
Locking Flanged Inlet★	3434-C			
Locking Flanged Outlet★	3435-C			

<sup>††</sup>Effective July 1, 1981, rating for non-grounding versions was changed from 30A-250V AC/DC, 30A-600V AC to comply with UL requirements. Add (-G) for grounding devices: (-G) devices are rated 30A-250V AC/DC, 30A-600V AC and are no longer UL Listed — for replacement use only.

## 50 AMP Non-NEMA Locking Devices

50 AMP 250V DC/600V AC 2-Pole 3-Wire Grounding Non-NEMA

DESCRIPTION	CAT. NO.	CORD DIA. (inches)	WIRE GAUGE (stranded)	NON-NEMA CONFIG.
Single Locking Receptacle★	3771*			
Locking Plug★	3763-C	.680-.1.125	10-4	<p>NON-NEMA</p>
Locking Connector★	3762-C	.680-.1.125	10-4	
Locking Flanged Inlet★	3777			

50 AMP 250V DC/600V AC 3-Pole 4-Wire Grounding Non-NEMA

DESCRIPTION	CAT. NO.	CORD DIA. (inches)	WIRE GAUGE (stranded)	NON-NEMA CONFIG.
Single Locking Receptacle★	7379*			
Locking Plug★	7765-C	.680-.1.125	10-4	<p>NON-NEMA</p>
Locking Connector★	7764-C	.680-.1.125	10-4	

50 AMP 250V DC/600V AC 3-Pole 4-Wire Grounding Non-NEMA

DESCRIPTION	CAT. NO.	CORD DIA. (inches)	WIRE GAUGE (stranded)	NON-NEMA CONFIG.
Single Locking Receptacle★	3769*			
Locking Plug★	3765-C	.680-.1.125	10-4	<p>NON-NEMA</p>
Locking Connector★	3764-C	.680-.1.125	10-4	
Locking Flanged Inlet★	3775			

## Receptacle Cover

DESCRIPTION	CAT. NO.
Weather-protective die-cast aluminum receptacle cover with lift lid for Cat. Nos. 3769, 3771 and 7379★	7770



\*Uses Weatherproof Cover, Cat. No. 7788-CR or 7770.

For Corrosion Resistant Locking Devices, please check B-I-A Document # 7546.

Weather-Resistant Boots for 30A Locking Plugs and Connectors are listed in B-I-A Document # 7543.

\*\*Uses stainless steel wallplate, Cat. No. 84020-40. For additional wallplate selections, please call our sales office.

All devices are UL Listed. Also CSA certified except where indicated by★

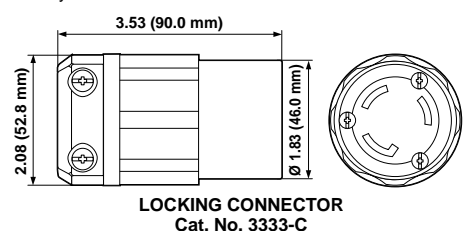

### 50 AMP "California Style" CS Non-NEMA Locking Devices

#### 50 AMP 125V 2-Pole 3-Wire Grounding Non-NEMA

DESCRIPTION	CAT. NO.	CORD DIA. (inches)	WIRE GAUGE (stranded)	NON-NEMA CONFIG.
Single Locking Receptacle★	CS63-70*			
Locking Plug★	CS63-61C	.680-1.125	10-4	
Locking Connector★	CS63-60C	.680-1.125	10-4	
Locking Flanged Inlet★	CS63-77			

#### 50 AMP 250V 2-Pole 3-Wire Grounding Non-NEMA

DESCRIPTION	CAT. NO.	CORD DIA. (inches)	WIRE GAUGE (stranded)	NON-NEMA CONFIG.
Single Locking Receptacle★	CS82-69*			
Locking Plug★	CS82-65C	.680-1.125	10-4	
Locking Connector★	CS82-64C	.680-1.125	10-4	
Locking Flanged Inlet★	CS82-75			

#### 50 AMP 125/250V 3-Pole 4-Wire Grounding Non-NEMA

DESCRIPTION	CAT. NO.	CORD DIA. (inches)	WIRE GAUGE (stranded)	NON-NEMA CONFIG.
Single Locking Receptacle★	CS63-69*			
Locking Plug★	CS63-65C	.680-1.125	10-4	
Locking Connector★	CS63-64C	.680-1.125	10-4	
Locking Flanged Inlet★	CS63-75			

#### 50 AMP 3Ø 250V AC 3-Pole 4-Wire Grounding Non-NEMA

DESCRIPTION	CAT. NO.	CORD DIA. (inches)	WIRE GAUGE (stranded)	NON-NEMA CONFIG.
Single Locking Receptacle★	CS83-69*			
Locking Plug★	CS83-65C	.680-1.125	10-4	
Locking Connector★	CS83-64C	.680-1.125	10-4	
Locking Flanged Inlet★	CS83-75			

#### 50 AMP 480V 2-Pole 3-Wire Grounding Non-NEMA

DESCRIPTION	CAT. NO.	CORD DIA. (inches)	WIRE GAUGE (stranded)	NON-NEMA CONFIG.
Single Locking Receptacle★	CS84-69*			
Locking Plug★	CS84-65C	.680-1.125	10-4	
Locking Connector★	CS84-64C	.680-1.125	10-4	
Locking Flanged Inlet★	CS84-75			

#### 50 AMP 3Ø 480V AC 3-Pole 4-Wire Grounding Non-NEMA

DESCRIPTION	CAT. NO.	CORD DIA. (inches)	WIRE GAUGE (stranded)	NON-NEMA CONFIG.
Single Locking Receptacle★	CS81-69*			
Locking Plug★	CS81-65C	.680-1.125	10-4	
Locking Connector★	CS81-64C	.680-1.125	10-4	
Locking Flanged Inlet★	CS81-75			

\*Uses Weatherproof Cover, Cat. No. 7788-CR or 7770.  
 For Corrosion Resistant Locking Devices, please check B-I-A Document # 7546.  
 All devices are UL Listed. Also CSA certified except where indicated by★



#### SPECIFICATIONS & FEATURES

- All-nylon construction that takes punishment and continues to perform
- Patented strain relief that provides maximum holding power
- Tight-fitting gaskets to seal out dust
- Easy identification of ratings
- Color-Coded large wire pockets and terminal screws
- Corrosion-resistant devices feature added plating

#### TESTING & CODE COMPLIANCE

- Non-NEMA devices meet/exceed UL 498 standards
- UL Fed Spec. Listed WC-596 (File #E-13399 — Cat. Nos. CS63-70, CS82-69, CS63-69, CS83-69, CS84-69, CS81-69; File #E-13399 — Cat. Nos. CS63-61C, CS63-60C, CS63-77, CS82-65C, CS82-64C, CS82-75, CS63-65C, CS63-64C, CS63-75, CS83-65C, CS83-64C, CS83-75, CS84-65C, CS84-64C, CS84-75, CS81-65C, CS81-64C, CS81-75)
- NOM Certified (#057)
- Backed by a Limited 10-Year Warranty

#### MATERIAL CHARACTERISTICS

Environmental: Flammability per UL94 or CSA C22/06 Requirements

