



Cable limiters are fusible devices that provide very fast short-circuit protection, primarily to faulted cables, but also to other conductors such as busway. Cable limiters do not have an ampere rating, and cannot be used to provide overload protection. Cable limiters are selected by cable size; for example, a 500 kcmil cable requires a 500 kcmil cable limiter. Their main use is to isolate faulted cables in circuits containing three or more parallel conductors per phase. They may be installed on the line side of the main service to provide short-circuit protection to the service conductors. This is especially important when service conductors are tapped from large low-voltage networks or from large low impedance transformers.

Cable limiters have terminals which permit them to be installed in a variety of equipment. The most common configuration is the offset blade on one end and the crimp terminal on the other end. This permits the limiter to replace a cable terminal (lug).

APPLICATIONS

- Service entrance conductors
- Between transformer or network bus and busway terminal boxes
- Large feeders with three or more conductors per phase

FEATURES

- Current-limiting characteristics provide protection to conductor insulation and reduce damage when faults occur.
- Properly applied cable limiters may permit the use of equipment with reduced withstand ratings
- Wide variety of terminations and cable ratings permit use in almost every situation.

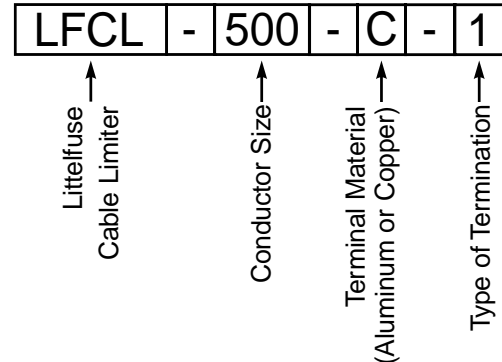
SPECIFICATIONS






Voltage rating: 600 volts AC

Interrupting rating: 200,000 Amperes

Cable size range: 2/0 - 750MCM Copper or Aluminum

ORDERING INFORMATION



DESCRIPTION		CATALOG NUMBER		
Type	Termination	Cable Size	Cable Type	
			COPPER	ALUMINUM
1	 Cable to Cable	2/0	LFCL2/0C1	LFCL4/0A1
		4/0	LFCL4/0C1	LFCL250A1
		250MCM	LFCL250C1	LFCL350A1
		350MCM	LFCL350C1	LFCL500A1
		500MCM	LFCL500C1	LFCL750A1
		750MCM	LFCL750C1	
3	 Cable to Offset Bus	2/0	LFCL2/0C3	LFCL4/0A3
		4/0	LFCL4/0C3	LFCL250A3
		250MCM	LFCL250C3	LFCL350A3
		350MCM	LFCL350C3	LFCL500A3
		500MCM	LFCL500C3	LFCL750A3
		750MCM	LFCL750C3	
5	 Straight Bus to Offset Bus	2/0	LFCL2/0C5	
		4/0	LFCL4/0C5	
		250MCM	LFCL250C5	
		350MCM	LFCL350C5	
		500MCM	LFCL500C5	
		750MCM	LFCL750C5	
6	 Mole to Cable	2/0	LFCL2/0C6	LFCL4/0A6
		4/0	LFCL4/0C6	LFCL250A6
		250MCM	LFCL250C6	LFCL350A6
		350MCM	LFCL350C6	LFCL500A6
		500MCM	LFCL500C6	LFCL750A6
		750MCM	LFCL750C6	
8	 Mole to Offset Bus	2/0	LFCL2/0C8	
		4/0	LFCL4/0C8	
		250MCM	LFCL250C8	
		350MCM	LFCL350C8	
		500MCM	LFCL500C8	
		750MCM	LFCL750C8	

Contact factory for shrink tubing availability.