




Lampholders and Ceiling Accessories

We offer a complete range of quality ceiling accessories to suit every installation including a new range of safety ceiling accessories and a compact uorescent lampholder which provides the ideal solution to the energy efficient lighting requirements detailed in the Building Regulations.

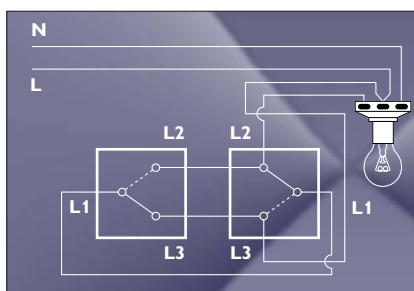

See [Doc. 8589](#) for Technical Informations



PENDANT SETS

LIST NO	DESCRIPTION	CARTON QTY
VX6677	Pendant fitting (VX9074 & VX1/T2) 6" HR flex, T2 rating	25
VX6678	Pendant fitting (VX9074 & VX1/T2) 9" HR flex, T2 rating	25
VX6679	Pendant fitting (VX9074 & VX0003HO) 6" HR flex, T2 rating	25

- Ceiling rose manufactured to BS67
- Lampholders manufactured to BS5042
- Heat resistant, 2 core, 0.75mm² PVC flexible cable



LOW ENERGY PENDANT SET

LIST NO	DESCRIPTION	CARTON QTY
VX6681CFL	10-13W 6" Pendant set with compact Fluorescent Lampholder	1

- 42mm diameter Lampshade
- Accepts G24 4 pin lamp (not supplied)
- See [Doc. 8589](#) for technical details



SAFETY PENDANT SET

LIST NO	DESCRIPTION	CARTON QTY
VX6850	6" cord (VX9074 & VX0850)	10

- Supplied with appropriate length of heat resistant 0.75mm² twin core circular cord to BS 6141 for service loads up to 2.5kg



STRAIGHT BATTEN LAMP HOLDERS, WITH INTEGRAL TERMINAL BLOCK

LIST NO	DESCRIPTION	CARTON QTY
VX9215	Heat resistant, 3 terminals & earth, short skirt, T2 rating	10
VX9215HO	Heat resistant, 3 terminals & earth, home office skirt, T2 rating	10

- BS EN 61184, T2 Rating
- In-line integral terminal block: 3 live, 2 switch, 3 neutral
- Each terminal accepts up to 1.5mm² cable
- Separate earth terminal with 6.0mm² capacity
- 3 sets of knockouts
- Fitted with heat resistant tails



SAFETY LAMP HOLDERS

LIST NO	DESCRIPTION	CARTON QTY
VX0850	Safety pendant lampholder	20
VX0851	Safety batten lampholder	1

- BS EN 61184 where applicable, T2 rating
- Fixed terminals on pendant lampholder accept 1.0m cable
- Batten lampholder has terminals for live, neutral, loop in and protective earth
- Fixed terminal strip on batten lampholder accepts 1.5m cable
- Home Office shield supplied with the safety batten lampholder
- 'Wipe clean' contacts avoid seizure to pins making for safe and easy lamp replacement



STRAIGHT BATTEN LAMP HOLDERS

LIST NO	DESCRIPTION	CARTON QTY
VX0205	Heat resistant, 3 terminals, short skirt, T2 rating	10
VX0205HO	Heat resistant, 3 terminals, home office skirt, T2 rating	10

- BS EN 61184, T2 Rating
- Direct wiring to lampholder for VX0205 series
- 50.8mm fixing centres



ANGLED BATTEN LAMP HOLDERS

LIST NO	DESCRIPTION	CARTON QTY
VX0208HO	Heat resistant, 3 terminals, home office skirt, T2 rating	10
VX0218HO	Heat resistant, 3 terminals & earth, home office skirt, T2 rating	10

- BS EN 61184, T2 Rating
- VX0208HO – Direct wiring to lampholder
- VX0218HO – Separate 4 way terminal block with lampholder tails and integral backplate
- 50.8mm fixing centres



PENDANT LAMP HOLDERS

LIST NO	DESCRIPTION	CARTON QTY
VX1/T2	Cord grip lampholder; heat resistant, short skirt, spring plungers, T2 rating	20
VX1/T2HO	Cord grip lampholder; heat resistant, home office skirt, spring plungers, T2 rating	10
VX4522	1/2" screwed entry double pole switched lampholder	20

- BS EN 61184, T2 Rating
- All unswitched lampholders have one-piece thermoplastic construction of interior
- Switched lampholder has metal interior
- Non-rising terminals, ensuring that cables are not disturbed when the lamp is changed
- Non-stick skirt and cap



CEILING ROSES

LIST NO	DESCRIPTION	CARTON QTY
VX9074	3 terminals & earth	10

- BS67
- VX9074 – In-line integral terminal block: 3 live, 2 switch, 3 neutral
 - Each terminal accepts up to 1.5mm² cable
 - Separate earth terminal with 6.0mm² capacity
 - 3 sets of knockouts
 - 3 fixing holes at 50.8mm centres



6A CEILING SWITCHES

LIST NO	DESCRIPTION	CARTON QTY
VX9001	1 way, 6A ceiling switch	10
VX9002	2 way, 6A ceiling switch	10

- BS EN 60669-1
- Supplied with pull cord
- 50.8mm fixing centres



50A DP CEILING SWITCH

LIST NO	DESCRIPTION	CARTON QTY
VX9706	DP ceiling switch with neon & mechanical 'off' indicator	5

- BS EN 60669-1
- Terminal suitable for all cables up to 10mm²
- 60.3mm fixing centres
- Pillar terminals suitable for all cables up to 10mm²
- For ease of wiring, 2 earth terminals are fitted

Mounting boxes

For use with surface box VX9405



JUNCTION BOXES

LIST NO	DESCRIPTION	CARTON QTY
VX9023BK	30A, 3 terminals, black	10
VX9023	30A, 3 terminals, white	10
VX9029BK	20A, 4 terminals, black	10
VX9029	20A, 4 terminals, white	10

- BS6220
- The selective entry shutters on the cover close any entry slots not in use
- Symbols clearly show which entries are open and closed
- Slotted pillar terminals accept up to 4x4mm² (30A) or 4x1.5mm² (20A) twin & earth cables



MOUNTING BLOCKS

LIST NO	DESCRIPTION	CARTON QTY
VX20/2	2 terminal	20



ANCILLARY ITEMS

LIST NO	DESCRIPTION	CARTON QTY
VX0009	Shade ring	100
VX0010	Short skirt	50
VX0011	Home office skirt	50
VX0018	Break ring	50
VX0219	Large ring for VX0215/0218 batten lampholders	10