



## Straight Blade Plugs and Connectors

### Residential Grade



### 15 AMP 125V 2-Pole, 3-Wire Grounding Plugs and Connectors

15 AMP 125V 2-Pole, 3-Wire Grounding

DESCRIPTION	CAT. NO.	COLOR	CORD DIA. (inches)	WIRE GAUGE (stranded)	NEMA CONFIG.
Vinyl Handle Plug, w/Cord Clamp★	48648	Black	.437 max.	18-14	
Vinyl Connector, w/ Steel Cord Clamp	617	Black	.437 max.	16 max.	
Rubber Plug w/Vinyl Inner Assembly	113	Black	.396-.562	18-14	5-15P 
Rubber Connector mates w/No. 113 above	114	Black	.396-.562	18-14	5-15R 
Weatherproof Inlet on Flush Mount Wallplate with Aluminum Cover	4937			No. 10 max. copper or copper clad	

All devices are UL Listed. Also CSA Certified except where indicated by★

#### SPECIFICATIONS & FEATURES


- Double wipe brass contacts for maximum conductivity and blade retention

#### TESTING & CODE COMPLIANCE


- Meet NEMA requirements
- UL Listed (File #E-13393)
- CSA Certified (File #LR-406)
- NOM Certified (#057)
- Backed by a Limited Two-Year Warranty

#### MATERIAL CHARACTERISTICS

Environmental: Flammability, Rated V2 per UL 94  
Operating Temperature: -40°C to 65°C

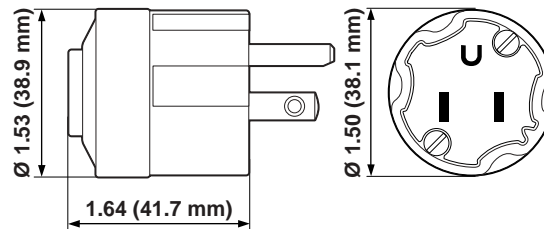

Cat. No. 113

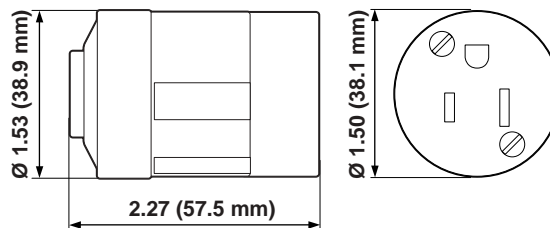

Cat. No. 114