



5372-S00

30 Amp, 250 Volt, NEMA 6-30R, 2P, 3W, Flush Mtg Receptacle, Straight Blade, Industrial Grade, Grounding, Side Wired, Steel Strap, - Black

WARNING: Do not use with single-gang wallboxes, single-gang mud rings or single-gang box extenders.

Built of durable thermoplastic, Power Receptacles — come equipped with heavy-gauge, double-wire copper alloy contacts. Flush mount receptacles fit a wide range of 2.15"-diameter wallplates and mounting hardware is included.

UPC Code: 078477695395
Country Of Origin: Mexico
NEMA: 6-30R

Technical Information

AC Horsepower Ratings

At Rated Voltage: 2 HP

Electrical Specifications

Amperage: 30 A
Current Limiting: Full Rated Current
Dielectric Voltage:
Withstands 2000V per UL498
Grounding: Grounding
Pole: 2
Temperature Rise:
Max 30C after 50 cycles OL
at 150 percent rated current
Voltage: 250 VAC
Wire: 3

Environmental Specifications

Flammability: Rated V-2 per UL 94
Operating Temperature: -40°C to 60°C

Material Specifications

Body Material: Thermoplastic
Color: Black
Face Material: Thermoplastic
Line Contacts: Brass Double-Wipe
Strap Material: Galvanized Steel

Mechanical Specifications


Product ID:
Ratings are permanently marked on device
Terminal Accom.: Up to 4 AWG
Terminal ID: X=Hot Y=Hot GR=Ground

Product Features

Color: Black
NEMA: 6-30R

Standards and Certifications

ANSI: C73
CSA: 22.2 No 42, C22.2 No.14,
C22.2 No.65
UL File: E13399
NEMA: WD-6
NOM: NOM - ANCE
UL: UL 498, UL 486E

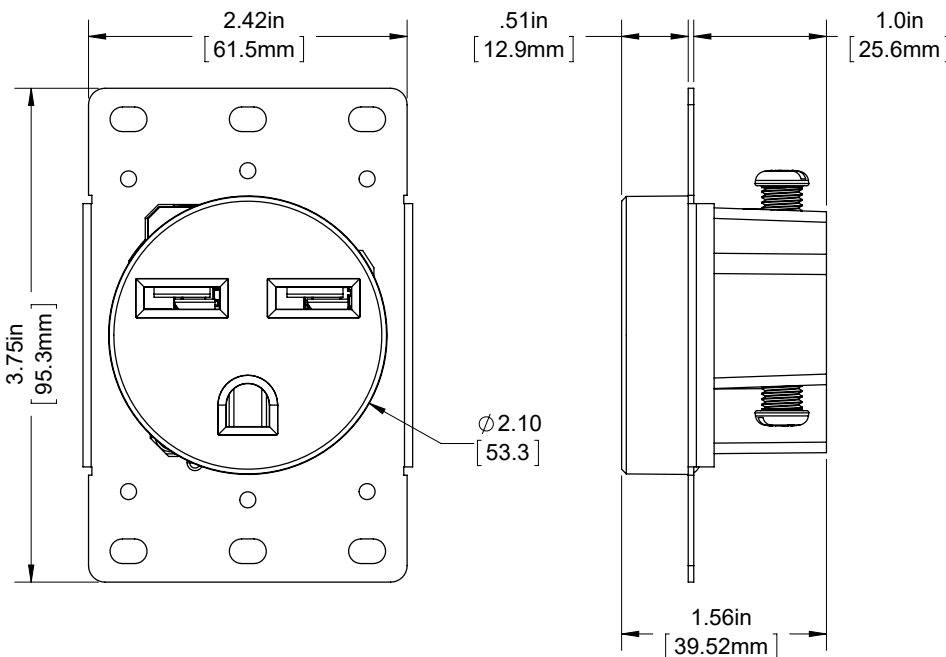

**2 Pole 3 Wire Grounded
250V**

