


## Catalog No.: 8200-LIG (Replaces older version 5262-IG with 6 Inch Lead)

**Description:** 15 Amp, 125 Volt, NEMA 5-15R, 2P, 3W, Slim Body Duplex Receptacle, Straight Blade, Hospital Grade, Isolated Ground with 6 Inch (152.4mm) Lead, Back & Side Wired, Steel Strap, Orange

**HOSPITAL GRADE** ●  
**ISOLATED GROUND** ▼

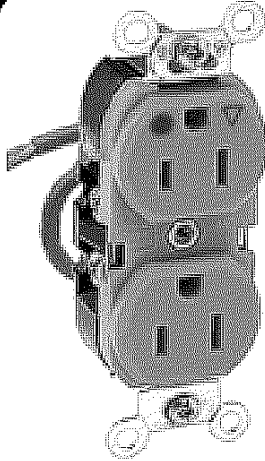

### Product Features:

- Grounding: Isolated Ground with 6 Inch Lead
- Amperage: 15 Amp
- Voltage: 125 Volt
- NEMA: 5-15R
- Pole: 2
- Wire: 3
- Termination: Back & Side
- Face Material: Nylon
- Body Material: Nylon
- Strap: Steel
- Color: Orange
- Standards and Certifications: UL/CSA

Electrical Specifications	
Dielectric Voltage	Withstands 2000V per UL498
Current Limiting	Full Rated Current
Temperature Rise	Max 30C at 250 cycles OL at 200 pct rated current

Mechanical Specifications	
Terminal ID	Brass-Hot, Green-Ground, White-Neutral
Terminal Accom.	14-10 AWG
Product ID	Ratings are permanently marked on device

Material Specifications	
Face Material	Nylon
Body Material	Nylon
Line Contacts	Brass Triple-Wipe
Terminal Screws	Brass 10-32
Grounding Screw	Brass 8-32
Yoke	Zinc-Plated Steel
Clamp Nuts	Zinc-Plated Steel
Ground Clip	Brass-Plated

Environmental Specifications	
Flammability	Rated V-2 per UL94
Operating Temp	-40C to 60C

AC Horsepower Ratings	
At Rated Voltage	1/2 HP

Standards and Certifications	
NEMA	WD-6
ANSI	C-73
UL498HG	File E13399
UL Fed Spec WC-596	File E13399
CSA C22.2 No. 42	File 152105
NOM	057

