

## USA / Canada / Mexico - Dustguard® Plugs and Connectors

### Dust-Tight Plugs and Connectors

#### Features and Benefits

- IEC / IP44 Rated, Dustguard®
- Developed to withstand dusty and dirty environments, cracking and fading, temperature extremes
- Rugged wiring modules have high performance 1-piece brass triple-wipe contacts, solid brass plug blades
- Self centering cord clamp accepts wide range of conductors, SVT 18/3 to SO 12/3 max. Diameter 0.375 to 0.655 inches, Ø (9.5 to 16.6)mm
- Operating Temperature: -40°C to +60°C
- Flammability, Rated V-2 per UL 94
- Solid Brass Blades/Contacts
- Yellow EPTR Rubber Body, Nylon Base
- Assembly Screws: Steel, Zinc Plated
- Standards and Certifications: UL / CSA / NOM



Dustguard Products  
Are Engineered to Meet  
or Exceed UL and IEC  
Dust-tight Standards





1447



1547

Plug Cat.No.	NEMA Plug	Connector Cat.No.	NEMA Connector	Description
1447	5-15P	1547	5-15R	15A 125V, 2-P 3-W Straight Blade, Grounding
1449	6-15P	1549	6-15R	15A 250V, 2-P 3-W Straight Blade, Grounding
1433	5-20P	1533	5-20R	20A 125V, 2-P 3-W Straight Blade, Grounding
1448	6-20P	1548	6-20R	20A 250V, 2-P 3-W Straight Blade, Grounding
2447	L5-15P	2547	L5-15R	15A 125V, 2-P 3-W Locking, Grounding

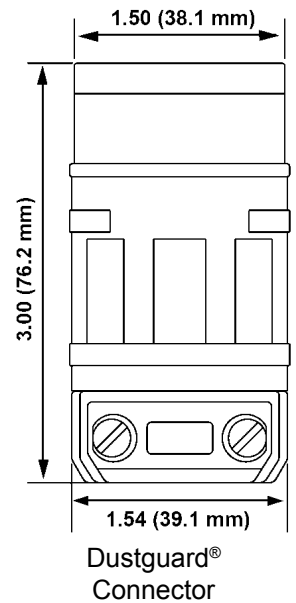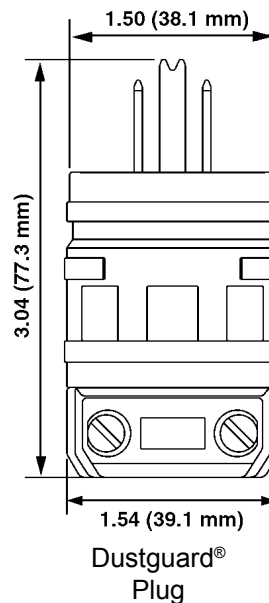

Dimensions in inches (mm)