

Double Contact Bayonet Metal Lampholders, BA15d Base

OEM Double Contact Bayonet Metal Lampholders, for Lamps with BA15d Base

Longer nickel-plated shell design conforms to the latest UL requirements by stabilizing the bulb against coaxial displacement. Mounting bracket, male bushing and shell are grounded independent of contacts.

Standard leads (2) are No. 18 AWG SEW-1 200°C 300V wire, 12" (304.8mm) long, stripped 1/2" (12.7mm).

Other wire types and lead lengths, and other mounting brackets are available upon request.


Specifications:

- **Ratings:** 500 Watt, 125 Volt
- **Certifications:** UL Listed (E13405)
CSA Certified (LR1863)
- **Standard pack:** Bulk (Please request for min. order quantity)



Catalog No.	Description
910-001	OEM Double Contact Bayonet Metal Lampholder, with Male Bushing
910-200	OEM Double Contact Bayonet Metal Lampholder, with Straight Mounting Bracket, Double Side
910-201	OEM Double Contact Bayonet Metal Lampholder, with Angled Mounting Bracket, Round & Slot Holes
910-203	OEM Double Contact Bayonet Metal Lampholder, with Straight Mounting Bracket, Round & Slot Holes
910-209	OEM Double Contact Bayonet Metal Lampholder, with Angled Mounting Bracket, Round Hole

Technical Data:

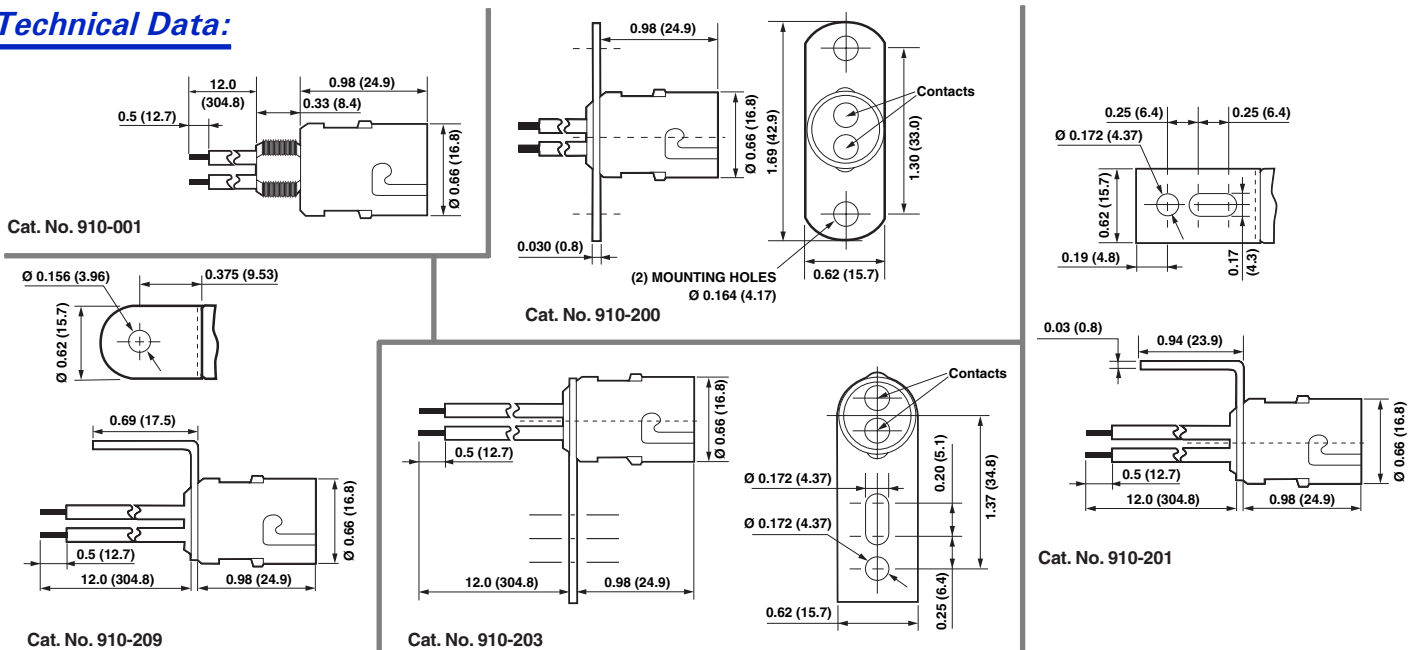

Warning: Double Contact Bayonet Lamps operate under pressure and high temperatures. To prevent socket damage, the design of the fixture and its application must be carefully considered. For manufacturer warranties to apply to this product, lamp wattage, current and beam spread must be controlled to ensure that the following temperature limits are never exceeded.

At contacts within socket: 225°C
Socket lead wires: 200°C

Note: Maximum rating of 250°C available when appropriately rated leads are used.

Technical data and dimensions are subject to change without notice. Dimensions in inches (mm).