



## 15, 20 and 30 AMP 120V and 20 AMP 277V


## Industrial Grade AC Switches

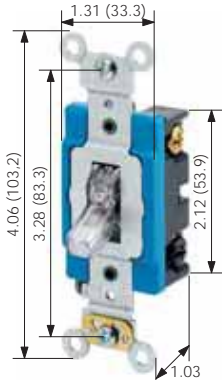


1201-PLC

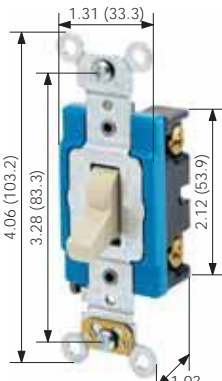

1201-LHI

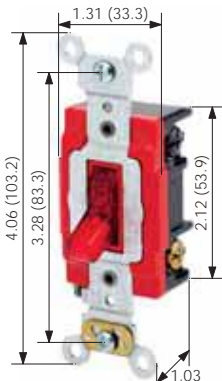

1222-PLR

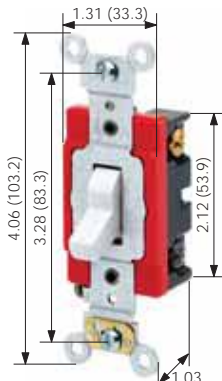

1223-LHW

### Pilot Light and Lighted Handle

#### Back and Side Wired Pilot Light

DESCRIPTION*	15 AMP 120V	20 AMP 120V	30 AMP 120V	20 AMP 277V
Single-Pole	1201-PL	1221-PL	3031-PL✓	1221-7P✓
Double-Pole	1202-PL+	1222-PL	3032-PL✓	1222-7P+
3-Way	1203-PL	1223-PL	—	1223-7P+

Note: Pilot light switches require a neutral wire; lighted handle switches do not require a neutral wire.

\*Available toggles for these devices: Clear (-PLC), Red (-PLR), Green (-PLG).

+Available in red toggle only.

✓ Available in clear or red toggle only.

#### Back and Side Wired Lighted Handle

DESCRIPTION†	15 AMP 120V	20 AMP 120V	30 AMP 120V	20 AMP 277V
Single-Pole	1201-LH	1221-LH	3031-LH*	1221-7L
3-Way	1203-LH	1223-LH	—	1223-7L

Note: Pilot light switches require a neutral wire; lighted handle switches do not require a neutral wire.

†Available toggles for these devices: Clear (-LHC), Ivory (-LHI), White (-LHW).

\*Available in ivory toggle only.

### Wallplates

THERMOPLASTIC			302 STAINLESS STEEL			
80701-I	80709-I	80711-W	84001-40	84001-E40	84009-40	84011-40

For complete wallplate selection, see Section E.

#### SPECIFICATIONS AND FEATURES

- Pilot light and lighted handle switches provide top performance in punishing industrial applications
- Lighted handle illuminated when load is OFF. Pilot light toggle illuminated when load is ON.
- 120 and 277V versions in single pole and 3-way
- Fully enclosed switch mechanism in rugged housing for strength, track and arc resistance
- Self-grounding clip (self-grounding when used with a grounded metal wallbox)

#### TESTING AND CODE COMPLIANCE

- Meets all NEMA WD 1 & 6, and ANSI requirements
- Meets Federal Specification WS-896
- UL Listed (File #E-7458)
- CSA Certified (File #152105)
- NOM Certified (#057)
- Backed by a Limited 10-Year Warranty

#### HORSEPOWER

15A	20A	30A
1/2 @ 120V	1 @ 120V	2 @ 120V

#### MATERIAL CHARACTERISTICS

Environmental: Flammability, Rated V2  
Operating Temperature: -40°C to 65°C.