

**INTERNATIONAL
AGENCIES
APPROVED**

CORDS & ELECTRICAL

INTERNATIONAL POWER SUPPLY CORDS

CONTINENTAL EUROPEAN

INTERNATIONAL CORD APPLICATIONS:

- With Electronic Equipment to be Used in Europe
- With Consumer Electronics and Appliances

CHARACTERISTICS

OPERATING TEMPERATURE:

- -15°C to 70°C

VOLTAGE RATING:


- 250 Volt

COLOR DESCRIPTION:

- Color Code: Blue, Brown, Yellow/Green
- Jacket Color: Black

PRODUCT DESCRIPTION:

- Conductor: Stranded Bare Copper
- Insulation: Color-Coded PVC
- Jacket: PVC or Neoprene

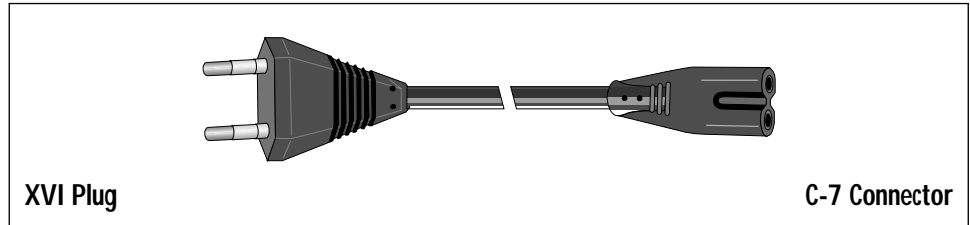



XVI Plug

C-7 Connector

UNSHIELDED - 2 CONDUCTOR


CORDAGE TYPE: HO3VVH2F2X0.75

Part No.	Length		Conductor				Diameter Nominal		Power Rating		
	Ft.-in.	m	Approx. AWG	mm ²	Strand	mm	In.	mm	Watts	Amps	Volts
952	5.5	1,8	18	0,75	23/32	23 x 0,20	0.133 x .22	0,40 x 5,60	625	2.5	250

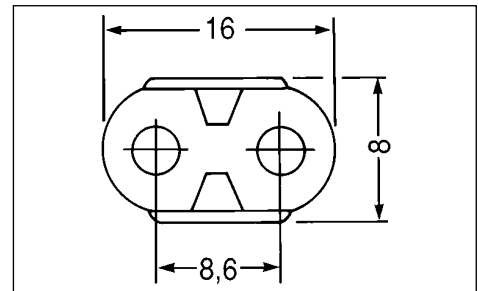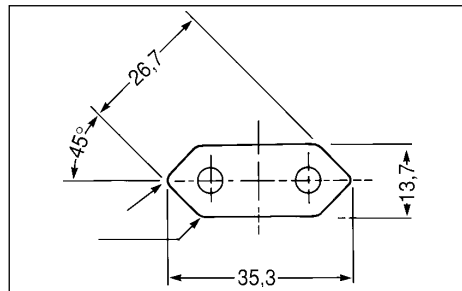

SPECIFICATIONS

- VDE – Germany
- SEMKO – Sweden
- OVE – Austria
- DEMKO – Denmark
- N.V. KEMA – Netherlands
- SETI – Finland
- UNE – Spain
- CEBEC – Belgium
- UTE – France
- NEMKO – Norway

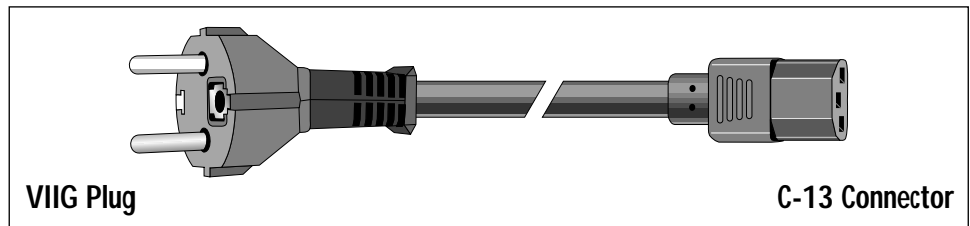



VIIG Plug

C-13 Connector

UNSHIELDED - 3 CONDUCTOR

CORDAGE TYPE: HO5VVF3G1.00

Part No.	Length		Conductor				Diameter Nominal		Power Rating		
	Ft.-in.	m	Approx. AWG	mm ²	Strand	mm	In.	mm	Watts	Amps	Volts
920	8.2	2,5	16	1,00	31/32	31 x ,20	0.270	6,80	2500	10	250

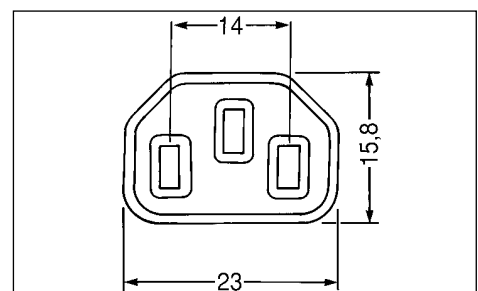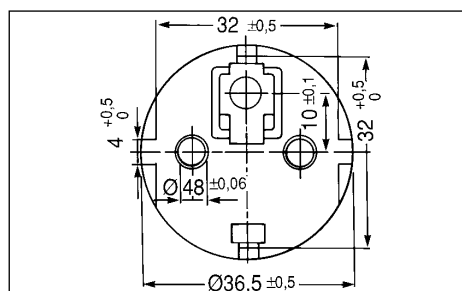

AVAILABILITY

- 25 Piece Packages