

Fuse Blocks, Holders and Accessories

Class J POWR-SAFE Holders



POWR-SAFE "Dead Front" fuseholders provide optimum protection to personnel. An integral DIN-Rail adapter system allows fuse holders to be mounted on 35mm DIN-Rail without the use of tools or special parts. Indicating and non-indicating versions are available in 1, 2, or 3 poles for Class J fuses.


SPECIFICATIONS

- Voltage Rating:** 600 VAC
- Interrupting Rating:** 200 kA
- Ampere Rating:** 30 and 60 amperes
- Terminal Type:** Pressure plate
- Suggested Torque:** 30A – 35 inch-pounds
60A – 45 inch-pounds
- Wire Range:** #2 – #14CU
- Material:** Thermo-plastic
- Flammability Rating:** 94V0
- Approvals:** UL Listed
CSA Certified
IEC Type IP20 Protection
CE


FEATURES/BENEFITS

- Meets "Dead Front" requirements and IEC Type IP20 protection.
- Mountable on 35mm DIN-Rail.
- Blown fuse identification (Indicating versions only).
- Easy installation and removal of fuses. No special fuse pullers or tools required.
- UL listed for branch circuit protection.
- Ventilated design for cooler operation.

DIMENSIONS in inches (mm in parentheses)

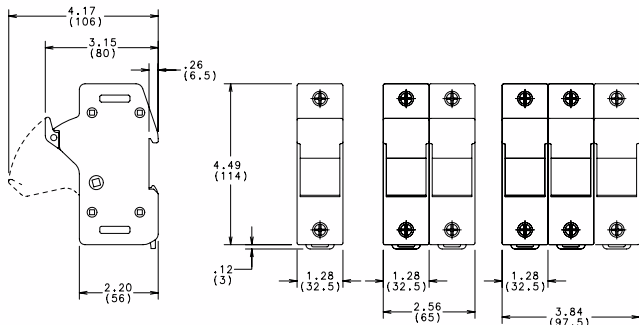

30 Amp

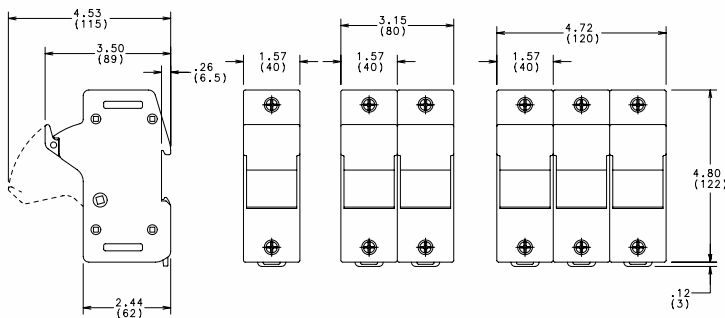

60 Amp

ORDERING INFORMATION

Catalog No.	System No.	No. of Poles	Pack Qty.	Voltage Rating	Ampere Rating	Options
LPSJ30-1	LPSJ301.Z	1	6	600V	30A	–
LPSJ30-2	LPSJ302.Z	2	3	600V	30A	–
LPSJ30-3	LPSJ303.Z	3	2	600V	30A	–
LPSJ30-1ID	LPSJ301.ZXID	1	6	600V	30A	Indicating
LPSJ30-2ID	LPSJ302.ZXID	2	3	600V	30A	Indicating
LPSJ30-3ID	LPSJ303.ZXID	3	2	600V	30A	Indicating
LPSJ60-1	LPSJ601.Z	1	6	600V	60A	–
LPSJ60-2	LPSJ602.Z	2	3	600V	60A	–
LPSJ60-3	LPSJ603.Z	3	2	600V	60A	–
LPSJ60-1ID	LPSJ601.ZXID	1	6	600V	60A	Indicating
LPSJ60-2ID	LPSJ602.ZXID	2	3	600V	60A	Indicating
LPSJ60-3ID	LPSJ603.ZXID	3	2	600V	60A	Indicating