

B228PUNV-C

APPLICATION and PERFORMANCE SPECIFICATION

Description: Electronic ballast(s) for (1/2) F28T5 or (1/2) F35T5 or (1/2) F21T5 or (1/2) F14T5

- Line Voltage: 120 - 277 vac, ±10%, 50/60Hz
- Series Lamp Operation
- Auto Reset after Lamp Replacement
- Programmed Rapid Start
- Active Power Factor Correction
- End of Lamp Life Shutdown Circuitry

Model	Line Volts	No. of Lamps	Lamp Type	Input Watts	Nominal Line Amps	Ballast Factor	Power Factor	Harmonic Total	Crest Factor
B228PUNV-C	120	2	F28T5	66	0.55	1.00	> 0.98	< 10%	< 1.7
	120	1	F28T5	33	0.28	1.00	> 0.98	< 10%	< 1.7
	277	2	F28T5	64	0.23	1.00	> 0.98	< 10%	< 1.7
	277	1	F28T5	33	0.12	1.00	> 0.95	< 10%	< 1.7
	120	2	F35T5	81	0.67	1.00	> 0.98	< 10%	< 1.7
	120	1	F35T5	40	0.34	1.00	> 0.98	< 10%	< 1.7
	277	2	F35T5	78	0.28	1.00	> 0.98	< 10%	< 1.7
	277	1	F35T5	40	0.15	1.00	> 0.95	< 10%	< 1.7
	120	2	F21T5	49	0.41	1.00	> 0.98	< 10%	< 1.7
	120	1	F21T5	25	0.21	1.03	> 0.98	< 10%	< 1.7
	277	2	F21T5	48	0.18	1.00	> 0.98	< 10%	< 1.7
	277	1	F21T5	25	0.10	1.03	> 0.95	< 15%	< 1.7
	120	2	F14T5	34	0.28	1.00	> 0.98	< 10%	< 1.7
	120	1	F14T5	18	0.15	1.05	> 0.98	< 10%	< 1.7
277	2	F14T5	34	0.13	1.00	> 0.95	< 10%	< 1.7	
277	1	F14T5	18	0.07	1.05	> 0.90	< 15%	< 1.7	

Application and Performance Specification Information Subject to Change without Notification.

Performance:

- Meets ANSI Standard C82.11-1993
- Meets ANSI Standard C62.41-1991
- Meets FCC Part 18 (Class A) for EMI and RFI Non-Consumer Limits

Safety:

- No PCB's
- UL listed (Class P, Type 1 Outdoor)
- CSA Certified

Application:

- Minimum Starting Temperature: 0 °F, -18 °C
- Maximum Ambient Temperature: 104 °F, 40°C
- Maximum Case Temperature(tc): 167 °F, 75 °C
- Sound Rating: Class A
- Remote Mounting: 18 ft.
- Wire Trap, Plug-in Connectors are Standard
- Leadwire Option Available


Physical Parameters

	Inches	Metric
• Mounting Length: (Center to Center)	13.75" +/- 0.01"	349.3 mm
• Overall Length:	14.25" +/- 0.01"	362 mm
• Width:	1.18" + 0.03"/- 0.02"	30 mm
• Height:	1.00" + 0.04"/- 0.01"	25.4 mm
• Weight:	1 lbs.	0.4 kg
• Carton Quantity:	10 pieces	

Warranty:

The manufacturer warrants to the purchaser that each electronic ballast will be free from defects in material or workmanship for a period of 5 years from date of manufacture when properly installed and under normal conditions of use.

Manufactured in North America

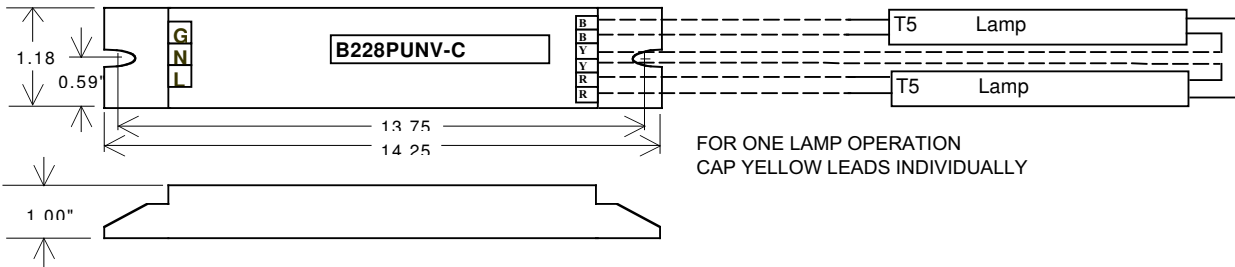

Ground to Case or Input Terminal (G)