


## Australia - Non-Detachable Power Supply Cords

### SPECIFICATIONS

- Molded PVC male grounding plug.
- Straight, with flex strain relief.
- Plug Standard: AS 3112
- Standard bulk packaged
- Approvals: SAA
- Molded PVC over nylon insert, straight male grounding plug with flex type strain relief. Nickel-plated brass solid blades.

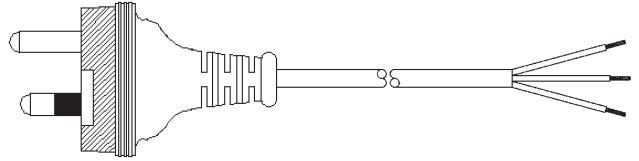

Molded  
Grounding Plug  
AS 3112 UC-822

Remove Outer Jacket  
Striped and Twisted  
2nd End see below

Catalog No.*	Rating	Color	Plug No.	Wire Type	Color <sup>1</sup>	Nominal $\varnothing$	2nd End	VPE/Pack	EDP-No.
8200-25M-BB	10A-250V	Black	UC-822	H05VV-F 3G1.0mm <sup>2</sup>	CEE	7.1mm	50/12mm	50 ea	118690

\* Catalog No. indicates: **Series - Length Code - Color Code** (e.g. BB = all Black, GG = all Gray)

<sup>1</sup> Conductor Color Code: CEE = Brown, Blue, Green/Yellow

Part Number: **UC-822**

Configuration: AS3112


Description: Molded Grounding Plug

Ratings: 10A/250V

Approvals: SAA

Wire Type(s): LIGHT DUTY ROUND 3G0.75MM<sup>2</sup>;  
ORD DUTY ROUND 3G0.75MM<sup>2</sup>, 3G1.0MM<sup>2</sup>;  
H03VV-F 3G0.75MM<sup>2</sup>; H05VV-F 3G0.75MM<sup>2</sup>, 3X1.0MM<sup>2</sup>

Features: Molded PVC over nylon insert, straight male  
grounding plug with flex type strain relief.  
Nickel-plated brass solid blades.

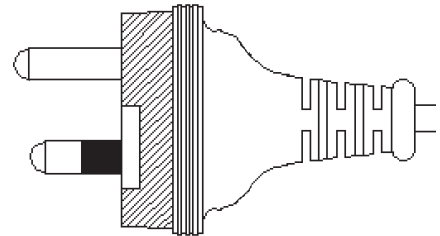

To learn more about B-I-A please visit us at our  
WEB site: [www.BiaGmbH.com](http://www.BiaGmbH.com)

