

North America - Non-Detachable Appliance Connector (C19)




Catalog No. : UC-033

Description : Molded Appliance Connector
Standard : European IEC 60320/C19
Ratings : 20A 125V AC, 20A 250V AC
Wires/Poles : 2 Pole 3 Wire Grounding (2P + E)
Applications : For Class I Equipment
Approvals : UL, cUL

Features : Molded PVC over PC insert.
Straight female connector with
finger grip. Spring contacts.

U.S.A. / Canada

Available with Cords:






Round, Medium Duty
SJT, SJT shielded,
SJTO

Round, Heavy Duty
ST, STO

Popular Cordage AWG Size/Cond.	Jacket Material	Conductor Size (mm ²)	Amp.* Rating	Insulation Material	Stranding (No. x AWG)	Insulation (mm) Thickness	Jacket (mm) Thickness / O.D.	Temp. Ratings
SJT 14/3	PVC	2.080	18A	PVC	41 x 30	0.76	0.76 / 9.5	60/105°C
SJT 12/3	PVC	3.290	20A	PVC	65 x 30	0.76	1.14 / 10.9	60/105°C
<i>Medium duty cordage: SJTO oil resistant</i>								
ST 14/3	PVC	2.080	18A	PVC	41 x 30	0.76	2.03 / 13.5	60/105°C
ST 12/3	PVC	3.290	20A	PVC	65 x 30	0.76	2.41 / 15.8	60/105°C
<i>Heavy duty cordage: STO oil resistant</i>								
<i>Special constructions (cordage, length, color, terminations, terminals, etc.) available on request. *Ampere Rating depending on configuration.</i>								

Dimensional Data:

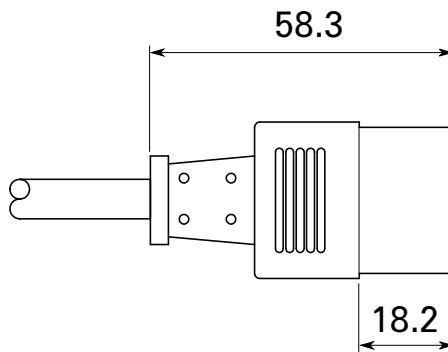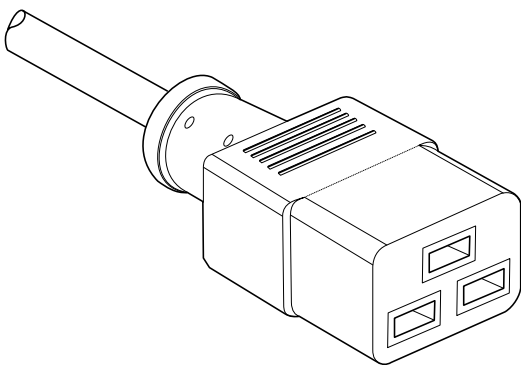

Technical data and dimensions are subject to change without notice.

Dimensions in mm