

## China - Non-Detachable Power Plug, 2 Poles



Catalog No. : UC-051

Standard : Chinese GB 1002

Ratings : 10A, 250V AC

Applications : For Class II Equipment

China, Peoples Republic of

Available with Cords:



**6A/250V AC**

**10A/250V AC**

H03VVH2-F

H05VVH2-F

H03VV-F




H05VV-F

RVV 300/300V

RVV 300/500V

Cordage Type	Jacket Material	Conductor Size (mm <sup>2</sup> )	No. of Cond.	Insulation Material	Stranding (pcs/mm)	Insulation (mm) Thickness	Jacket (mm) Thickness / O.D.	Temp. Ratings
<b>6A/250V AC</b>								
H03VVH2-F	PVC	0.75	2	PVC	24 / 0.200	0.50	0.60 / 3.5 x 5.7	70°C
H03VV-F	PVC	0.75	2	PVC	24 / 0.200	0.50	0.60 / 5.5	70°C
RVV 300/300V	PVC	0.75	2	PVC	24 / 0.200	0.50	0.60 / 3.5 x 5.7	70°C
<b>10A/250V AC</b>								
H05VVH2-F	PVC	1.00	2	PVC	32 / 0.200	0.60	0.85 / 4.2 x 6.8	70°C
H05VV-F	PVC	1.00	2	PVC	32 / 0.200	0.60	0.85 / 6.7	70°C
RVV 300/500V	PVC	1.00	2	PVC	32 / 0.200	0.60	0.85 / 6.7	70°C

### Dimensional Data:

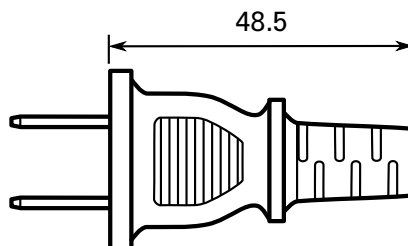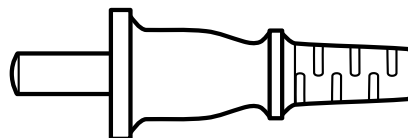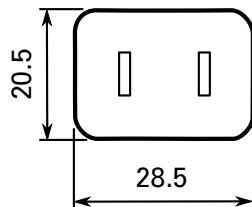

Dimensions in mm