

## China - Non-Detachable Power Plug, 3 Poles, 10 Amp.



Catalog No. : UC-054

Standard : Chinese GB 1002 (Right Angle)

Ratings : 10A, 250V AC

Applications : For Class I Equipment

China, Peoples Republic of

Available with Cords:



**6A/250V AC**

**10A/250V AC**

H05VV-F


H05VV-F

RVV 300/500V

RVV 300/500V

Cordage Type	Jacket Material	Conductor Size (mm <sup>2</sup> )	No. of Cond.	Insulation Material	Stranding (pcs/mm)	Insulation (mm) Thickness	Jacket (mm) Thickness / O.D.	Temp. Ratings
<b>6A/250V AC</b>								
H05VV-F	PVC	0.75	3	PVC	24 / 0.210	0.60	0.80 / 6.7	70°C
RVV 300/500V	PVC	0.75	3	PVC	24 / 0.200	0.60	0.80 / 6.4	70°C
<b>10A/250V AC</b>								
H05VV-F	PVC	1.00	3	PVC	32 / 0.210	0.60	0.80 / 7.0	70°C
RVV 300/500V	PVC	1.00	3	PVC	32 / 0.200	0.60	0.80 / 6.8	70°C

### Dimensional Data:

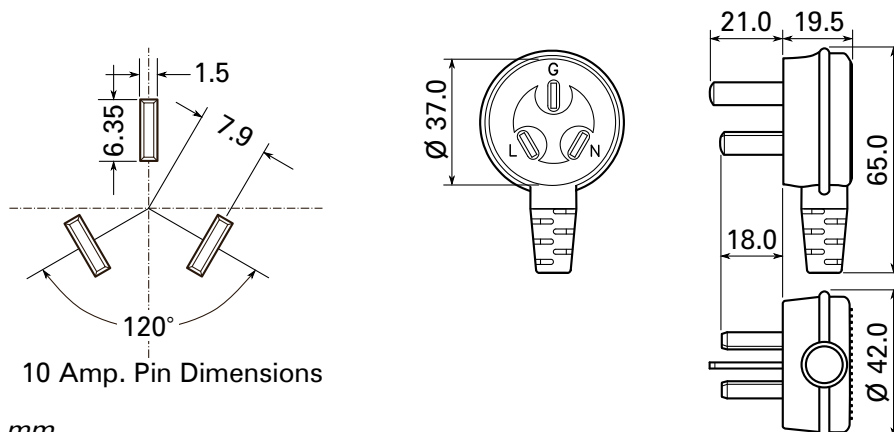

Dimensions in mm