

International Power Supply Cords

Australia / Japan

Molded
Grounding Plug
AS3112
UC-822



Remove Outer
Jacket 50mm
Strip and Twist 12mm




AUSTRALIA/NEW ZEALAND

Type SAA Ordinary Duty, PVC Jacketed, 75°C

PART NUMBER	RATING	SIZE & COND.	COLOR CODE	LENGTH Ft/Mtrs.	NOM. O.D. mm	STD. PKG.	PKG. WT. lbs.
8200-25M-BB	10A-250V	1.0mm ² x3C	CEE	8'/2.5	7.1	50	28

Standard bulk packaged

Molded
Grounding Plug
AS3112
UC-822



Molded PVC
Receptacle
IEC 320/C13 UC-051




Type SAA Ordinary Duty, PVC Jacketed, 75°C

PART NUMBER	RATING	SIZE & COND.	COLOR CODE	LENGTH Ft/Mtrs.	NOM. O.D. mm	STD. PKG.	PKG. WT. lbs.
8250-25M-BB	10A-250V	1.0mm ² x3C	CEE	8'/2.5	7.1	50	30
8250-25M-GG	10A-250V	1.0mm ² x3C	CEE	8'/2.5	7.1	50	30

Standard tied loop hank

Molded Plug
AS3112
UC-821



Remove Outer
Jacket 50mm
Strip and Twist 12mm





Type SAA Light Duty, PVC Jacketed, 75°C

PART NUMBER	RATING	SIZE & COND.	COLOR CODE	LENGTH Ft/Mtrs.	NOM. O.D. mm	STD. PKG.	PKG. WT. lbs.
8220-25M-BB	7.5A-250V	.75mm ² x2C	CEE	8'/2.5	1.3/6.6	100	32

Standard bulk packaged

Molded PVC
Grounding Plug
JIS 8303
UC-832

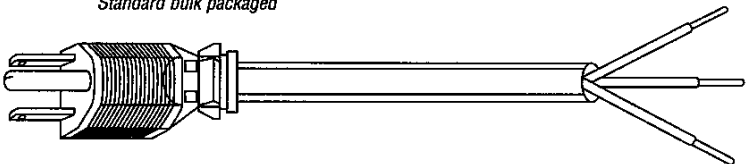

Remove Outer
Jacket 50mm
Strip and Twist 12mm




JAPAN

Type VCTF PVC Jacketed, 60°C

PART NUMBER	RATING	SIZE & COND.	COLOR CODE	LENGTH Ft/Mtrs.	NOM. O.D. mm	STD. PKG.	PKG. WT. lbs.
8300-25M-BB	15A-125V	2.0mm ² x3C	NA	8'/2.5	8.5	50	57
8301-25M-BB	7A-125V	.75mm ² x3C	NA	8'/2.5	7.0	100	42

Standard bulk packaged

Molded PVC
Grounding Plug
JIS 8303
UC-832



Molded PVC
Receptacle
IEC 320/C13 UC-837





Type VCTF PVC Jacketed, 60°C

PART NUMBER	RATING	SIZE & COND.	COLOR CODE	LENGTH Ft/Mtrs.	NOM. O.D. mm	STD. PKG.	PKG. WT. lbs.
8350-25M-BB	15A-125V	2.0mm ² x3C	NA	8'/2.5	8.5	75	60
8351-25M-BB	7A-125V	.75mm ² x3C	NA	8'/2.5	7.0	100	47

Standard tied loop hank

Molded PVC
2 Conductor Plug
JIS 8308
UC-830

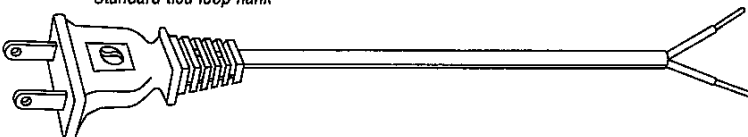

Remove Outer
Jacket 50mm
Strip and Twist 12mm



Type HVCTFK PVC Jacketed, 75°C

PART NUMBER	RATING	SIZE & COND.	COLOR CODE	LENGTH Ft/Mtrs.	NOM. O.D. mm	STD. PKG.	PKG. WT. lbs.
8320-25M-BB	7A-125V	.75mm ² x2C	NA	8'/2.5	4.3/6.6	150	45

Standard bulk packaged