

Israel - Rewirable Angeled Cord Connectors, 5019 Series

Angled Mains Line Connector with Grounding Contact, Israeli Standard, 2P + E, 16 Amp, 250 Volt AC



Specifications:

- **Ratings:** 16 Amp, 250 Volt AC
2 Pole 3 Wire Grounding (2P + E)
- **Compliant with Standards:** SI32 (1989) SII (Round Pins)
- **Ingress Protection:** IP20
- **Type of Terminals:** Screw Type
- **Contact Material:** Brass
- **Carrying Parts:** Polycarbonate
- **Cover/Enclosure:** Polycarbonate
- **Standard Color:** White

(Black on Special Order only, depending on quantities)




5019-WH

Catalog No.	Color	Description	Weight/ea	VPE/Pack	EDP No.
5019-BK	Black	Rewirable Angeled Cord Connector, 16A, 250V AC, 2P + E	51 g (net)	200/10	126063
5019-WH	White	Rewirable Angeled Cord Connector, 16A, 250V AC, 2P + E	51 g (net)	200/10	126062

Technical Data:

Product series:	5019 xx	Produktreihe:	5019 xx
Product description:	Rewireable Cord Connector, 2 pole 3 wire grounding, 16A 250V AC	Produktbeschreibung:	wiederanschließbare Kupplung, 2P + E, 16A 250V AC
Standards:	according SI32 (1989) Israel SII, RoHS compliant 2002/96/EC	Standarts:	nach SI32 (1989) Israel SII, RoHS konform 2002/96/EC
Type of material:	Thermoplastic	Werkstoff:	Kunststoff
Material specification:	Polycarbonate	Werkstoffgüte:	Polycarbonat
Contact material:	Brass	Kontaktmaterial:	Messing
Assembly screws:	Zinc plated steel	Montageschrauben:	Stahl, verzinkt
Ingress protection (IP):	IP20	Schutzart (IP):	IP20
Plug-in direction:	Angeled (90°)	Steckrichtung:	gewinkelt (90°)
Type of connection:	Screw terminals	Anschlussstechnik:	Schraubklemmen
Cordage sizes:	3 x 0.75mm ² , 3 x 1mm ² , 3 x 1.5mm ²	Leistungsgrößen:	3 x 0.75mm ² , 3 x 1mm ² , 3 x 1.5mm ²
Cable diameter:	10 mm max.	Leitungsdurchmesser:	10 mm maximal

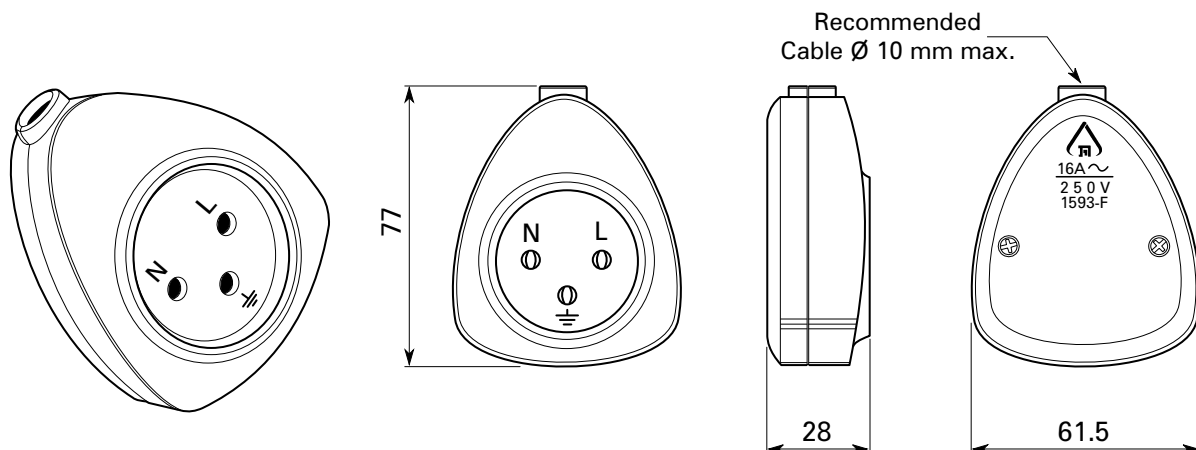

Technical data and dimensions are subject to change without notice. Dimensions in mm.