


Hook-Up Wire, 600 Volt, PVC

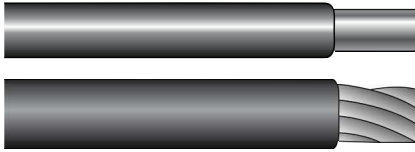

Catalog Number*	Wire Size		Stranding		Insulation Thickness		Nominal Diameter		UL Style	Hook-Up Wire Color Chart and Color Index
	AWG	mm ²	AWG	mm	Inch	mm	Inch	mm		
782607	26	0.14	7/34	7x0.16	0.032	0.81	0.083	2.11	1015,1230	Z2, 00-09
782401	24	0.20	Solid	1x0.51	0.032	0.81	0.084	2.13	1015,1230	Z2, 00-09
3070	24	0.23	7/32	7x0.20	0.032	0.81	0.088	2.24	1015	Z1, 01-10, 28
782201	22	0.32	Solid	1x0.64	0.032	0.81	0.089	2.26	1015,1230	Z2, 00-09
782207T	22	0.35	7/30	7x0.25	0.032	0.81	0.094	2.39	1015,1230	Z2, 00-09
3071	22	0.35	7/30	7x0.25	0.032	0.81	0.094	2.39	1015	Z1, 01-10, 28, 29
782010T	20	0.51	10/30	10x0.25	0.032	0.81	0.101	2.57	1015,1230	Z2, 00-09
3073	20	0.51	10/30	10x0.25	0.032	0.81	0.101	2.57	1015	Z1, 01-10, 28
782001	20	0.52	Solid	1x0.81	0.032	0.81	0.096	2.44	1015,1230	Z2, 00-09
781816T	18	0.81	16/30	16x0.25	0.032	0.81	0.111	2.82	1015,1230	Z2, 00-09
3075	18	0.81	16/30	16x0.25	0.032	0.81	0.111	2.82	1015	Z1, 01-10, 28-29
781801	18	0.82	Solid	1x1.02	0.032	0.81	0.104	2.64	1015,1230	Z2, 00-09
781601	16	1.31	Solid	1x1.29	0.032	0.81	0.115	2.92	1015,1230	Z2, 00-09
3077	16	1.32	26/30	26x0.25	0.032	0.81	0.124	3.15	1015	Z1, 01-10, 28-29
781401	14	2.08	Solid	1x1.63	0.032	0.81	0.128	3.25	1015,1230	Z2, 00-09
3079	14	2.08	41/30	41x0.25	0.032	0.81	0.138	3.51	1015	Z1, 01-10, 28-29
3080	12	3.29	65/30	65x0.25	0.032	0.81	0.157	3.99	1015	Z1, 01-04
781201	12	3.31	Solid	1x2.06	0.032	0.81	0.145	3.68	1015,1230	Z2, 00-09
781001	10	5.26	Solid	1x2.59	0.032	0.81	0.166	4.22	1015,1230	Z2, 00-09
3081	10	5.32	105/30	105x0.25	0.032	0.81	0.184	4.67	1015	Z1, 01-04
788133	8	8.61	133/29	133x0.29	0.047	1.19	0.263	6.68	1028,1231	Z2, 00-09
786133	6	13.57	133/27	133x0.36	0.063	1.60	0.336	8.53	1283,1232	Z2, 00-09
784133	4	21.55	133/25	133x0.45	0.063	1.60	0.395	10.03	1283,1232	Z2, 00-09
782665	2	33.72	665/30	665x0.25	0.063	1.60	0.461	11.71	1283,1232	Z2, 00-09
782133	2	34.45	133/23	133x0.57	0.063	1.60	0.465	11.81	1283,1232	Z2, 00-09
781259	1	41.96	259/25	259x0.45	0.082	2.08	0.540	13.72	1284,1232	Z2, 00-09
781836	1	42.39	836/30	836x0.25	0.082	2.08	0.547	13.89	1284,1232	Z2, 00-09
780001	1/0	52.98	1045/30	1045x0.25	0.082	2.08	0.592	15.04	1284,1232	Z2, 00-09
780002	2/0	67.43	1330/30	1330x0.25	0.082	2.08	0.647	16.43	1284,1232	Z2, 00-09
780003	3/0	84.47	1666/30	1666x0.25	0.082	2.08	0.768	19.51	1284,1232	Z2, 00-09
780004	4/0	106.93	2109/30	2109x0.25	0.082	2.08	0.754	19.15	1284,1232	Z2, 00-09

*Product may have c(UL) or CSA markings depending upon plant of manufacture.
 "T" indicates topcoat conductors.

Hook-Up Wire Color Chart Z1	01 White 02 Black 03 Red	04 Green 05 Yellow 06 Blue	07 Brown 08 Orange 09 Slate	10 Violet 11 White/Black 12 White/Red	13 White/Green 14 White/Yellow 15 White/Blue	16 White/Brown 17 White/Orange 18 White/Slate	19 White/Violet 28 Green/Yellow 29 Yellow/Green	30 Pink
Hook-Up Wire Color Chart Z2	00 Black 01 Brown 02 Red	03 Orange 04 Yellow 05 Green	06 Blue 07 Violet 08 Slate	09 White 45 Yellow/Green 54 Green/Yellow	90 White/Black 91 White/Brown 92 White/Red	93 White/Orange 94 White/Yellow 95 White/Green	96 White/Blue 97 White/Violet 98 White/Slate	P Pink T Tan X Clear

Technical data and dimensions are subject to change without notice.